

Block and Bleed Valves

BB, DB, SB and DBB Series



Contents

Overview	C-28
Features	C-28
Design Codes	C-28
Module Structures and Features	C-29
Standard Materials of Construction	C-30
Pressure-Temperature Ratings	C-30
Integral Type Flange Block and Bleed Valves	C-33
Split Type Flange Block and Bleed Valves	C-40
Wafer Type Flange Block and Bleed Valves	C-46
Butt-Welded Type Block and Bleed Valves	C-54
Injection Type Block and Bleed Valves	C-62
Sampling Type Block and Bleed Valves	C-64
Instrument Block and Bleed Valves	C-66

Notes:

- ⦿ Packing may need to be adjusted during valve use.
- ⦿ For better maintenance, when storing the block and bleed valves:
The needle valve should be in the half-open position.
The ball valve should be in the fully open position.
- ⦿ Ball valves that have not been opened for a period of time may have a high initial actuation torque.

Overview

Features


- ⦿ Integral type, split type or wafer type body construction available
- ⦿ Multiple functions available: double block and bleed, single block and bleed, double block, single block, injection and sampling
- ⦿ Compact design, weight, space and cost savings
- ⦿ Each valve is leak tested to a requirement in accordance with API 598
- ⦿ Optional fire-safe design to API-607, anti-static design to EN 12266-2 and NACE MR0175 compliance

Design Codes

ASME B16.34	Valves-Flanged, Threaded and Welding End
ASME B16.5	Pipe Flanges and Flanged Fittings
ASME B1.20.1	Pipe Threads, General Purpose
ASME B16.25	Buttwelding Ends
NACE MR 0175/ ISO 15156	Petroleum and Natural Gas Industries-Materials for use in H2S-containing Environments in Oil and Gas Production
API 598	Valve Inspection and Testing
API 607	Fire Test for Soft-Seated Quarter Turn Valves Testing of Valves
MSS SP-25	Standard Marking System for Valves, Fittings, Flanges and Unions
EN 12266-2	Industrial valves - Testing of metallic valves - Part 2: Tests, test procedures and acceptance criteria - Supplementary requirements.
EN 1092-1	Flanges and their joints - Circular flanges for pipes, valves, fittings and accessories, PN designated - Part 1: Steel flanges
MSS SP-97	Integrally Reinforced Forged Branch outlet Fittings-Socket Welding, Threaded, and Buttwelding Ends
ISO 17292	Metal ball valves for petroleum petrochemical and allied industries

Module Structures and Features


Ball Valve

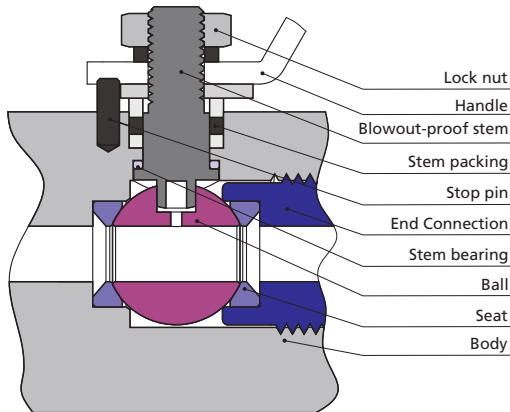

Designator: B

- ⦿ Pressure rating up to Class 2500
- ⦿ Bore sizes: NPS 3/8~NPS 2 (DN10~DN50)
- ⦿ Working temperature: -65°F to 450°F (-54°C to 232°C)
- ⦿ Side-loaded stem prevents stem blowout and enhances system safety
- ⦿ High-strength stem bearing provides smooth actuation and eliminates galling between valve stem and body
- ⦿ Packing adjustment may be required during the service life of the valves
- ⦿ Designed to be used in the fully open or fully closed position
- ⦿ Floating ball design to ensure the tightness under high pressure


Screwed Bonnet Needle Valve

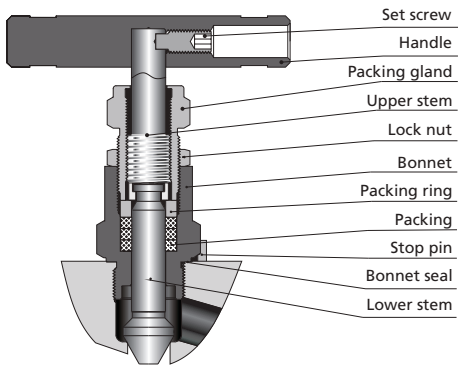

Designator: N

- ⦿ Maximum pressure up to 10000 psig
- ⦿ Bore sizes: 4 mm, 6.4 mm, 9.5 mm
- ⦿ Working temperature:
 - PTFE packing: -65°F to 450°F (-54 °C to 232°C)
 - Graphite packing: -65°F to 1200°F (-54°C to 649°C)
- ⦿ Upper stem threads cold rolled and lower stem surface hardened for high strength and smooth operation
- ⦿ Upper stem thread lubricant isolated from system media
- ⦿ Two-piece stem design: Linear instead of rotary motion of the rising, non-rotating stem minimizes packing abrasion and reduces the friction between the seat and the tip
- ⦿ Safety back seating seals in fully open position

Outside Screw and Yoke (OS&Y) Needle Valve

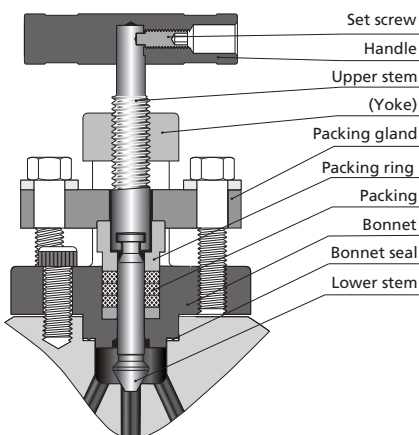

Designator: O

- ⦿ Pressure rating up to Class 2500
- ⦿ Bore Size: 4 mm
- ⦿ Working temperature:
 - PTFE packing: -65°F to 450°F (-54°C to 232°C)
 - Graphite packing: -65°F to 1200°F (-54°C to 649°C)
- ⦿ Upper stem threads cold rolled and lower stem surface hardened for high strength and smooth operation
- ⦿ Upper stem thread lubricant isolated from system media
- ⦿ Two-piece stem design: Linear instead of rotary motion of the rising, non-rotating stem minimizes packing abrasion and reduces the friction between the seat and the tip
- ⦿ Bolted bonnet enhances strength and reliability
- ⦿ Adjustable gland flange allows easy access to the packing gland and packing adjustment for an effective stem seal
- ⦿ Investment case yoke is formed by precision casting which enhances strength and perfect stem alignment

Handle colors indicate functions:

Ball Valves:

YELLOW=Isolation/Block RED=Bleed/Vent

Screwed Bonnet Needle Valves:

BLACK=Isolation/Block RED=Bleed/Vent

Bolted OS&Y Needle Valves:

BLACK=Isolation/Block RED=Bleed/Vent

Standard Materials of Construction

Material Component		316 SS	316L SS	Carbon Steel	Low Alloy Steel	Duplex Steel
Body		F316 / A182	F316L / A182	A105	LF2 / A350	F53 / A182
Ball Valve	Ball	316 / A479	316L / A479	316 / A479	316 / A479	S32750 / A479
	Stem	316 / A479	316L / A479	316 / A479	316 / A479	S32750 / A479
	End connection	316 / A479	316L / A479	316 / A479	316 / A479	S32750 / A479
	Seat	PEEK				
	Body Seal	Graphite or PTFE				
	Stem Packing	Graphite or PTFE				
Screwed Bonnet Needle Valves	Lower Stem	316 / A479	316 / A479	316 / A479	316 / A479	S32750 / A479
	Bonnet	316 / A479	316L / A479	316 / A479	316 / A479	S32750 / A479
	Bonnet Seal	316L / A269	316L / A269	316L / A269	316L / A269	S32750 / A790
	Stem Packing	Graphite or PTFE				
OS&Y Needle Valves	Lower Stem	316 / A479	316 / A479	316 / A479	316 / A479	S32750 / A479
	Bonnet	F316 / A182	F316L / A182	F316 / A182	F316 / A182	F53 / A182
	Bonnet Seal	316L / A269	316L / A269	316L / A269	316L / A269	S32750 / A790
	Stem Packing	Graphite or PTFE				

Pressure - Temperature Ratings

© Ratings are taken from ASME B16.34, Table 2-2.2 and Table VII-2.2.2. The rating data are based on stainless steel F316.

Temp. (°C)	ASME Rating							Temp. (°F)	ASME Rating					
	150	300	600	900	1500	2500			150	300	600	900	1500	2500
	Working Pressure (bar)								Working Pressure (psig)					
-29~38	19.0	49.6	99.3	148.9	248.2	413.7	-20~100	275	720	1440	2160	3600	6000	
50	18.4	48.1	96.2	144.3	240.6	400.9	200	235	620	1240	1860	3095	5160	
100	16.2	42.2	84.4	126.6	211.0	351.6	300	215	560	1120	1680	2795	4660	
150	14.8	38.5	77.0	115.5	192.5	320.8	400	195	515	1025	1540	2570	4280	
200	13.7	35.7	71.3	107.0	178.3	297.2	500	170	480	955	1435	2390	3980	
250	12.1	33.4	66.8	100.1	166.9	278.1	600	140	450	900	1355	2255	3760	
300	10.2	31.6	63.2	94.9	158.1	263.5	650	125	440	885	1325	2210	3680	
325	9.3	30.9	61.8	92.7	154.4	257.4	700	110	435	870	1305	2170	3620	
350	8.4	30.3	60.7	91.0	151.6	252.7	750	95	425	855	1280	2135	3560	
375	7.4	29.9	59.8	89.6	149.4	249.0	800	80	420	845	1265	2110	3520	
400	6.5	29.4	58.9	88.3	147.2	245.3	850	65	420	835	1255	2090	3480	
425	5.5	29.1	58.3	87.4	145.7	242.9	900	50	415	830	1245	2075	3460	
450	4.6	28.8	57.7	86.5	144.2	240.4	950	35	385	775	1160	1930	3220	
475	3.7	28.7	57.3	86.0	143.4	238.9	1000	20	365	725	1090	1820	3030	
500	2.8	28.2	56.5	84.7	140.9	235.0								
538	1.4	25.2	50.0	75.2	125.5	208.9								

© Ratings are taken from ASME B16.34, Table 2-2.3 and Table VII-2-2.3. The rating data are based on F316L stainless steel.

Temp. (°C)	ASME Rating							Temp. (°F)	ASME Rating					
	150	300	600	900	1500	2500			150	300	600	900	1500	2500
	Working Pressure (bar)								Working Pressure (psig)					
-29~38	15.9	41.4	82.7	124.1	206.8	344.7	-20~100	230	600	1200	1800	3000	5000	
50	15.3	40.0	80.0	120.1	200.1	333.5	200	195	510	1020	1535	2555	4260	
100	13.3	34.8	69.6	104.4	173.9	289.9	300	175	455	910	1370	2280	3800	
150	12.0	31.4	62.8	94.2	157.0	261.6	400	160	420	840	1260	2100	3500	
200	11.2	29.2	58.3	87.5	145.8	243.0	500	150	395	785	1180	1970	3280	
250	10.5	27.5	54.9	82.4	137.3	228.9	600	140	370	745	1115	1860	3100	
300	10.0	26.1	52.1	78.2	130.3	217.2	650	125	365	730	1095	1825	3040	
325	9.3	25.5	51.0	76.4	127.4	212.3	700	110	360	720	1080	1800	3000	
350	8.4	25.1	50.1	75.2	125.4	208.9	750	110	355	705	1060	1765	2940	
375	7.4	24.8	49.5	74.3	123.8	206.3	800	80	345	690	1035	1730	2880	
400	6.5	24.3	48.6	72.9	121.5	202.5	850	65	340	675	1015	1690	2820	
425	5.5	23.9	47.7	71.6	119.3	198.8								
450	4.6	23.4	46.8	70.2	117.1	195.1								

© Ratings are taken from ASME B16.34, Table 2-1.1 and Table VII-2-1.1. The rating data are based on A105/A350 LF2 (Not recommended for use above 425°C).

Temp. (°C)	ASME Rating							Temp. (°F)	ASME Rating					
	150	300	600	900	1500	2500			150	300	600	900	1500	2500
	Working Pressure (bar)								Working Pressure (psig)					
-29~38	19.6	51.1	102.1	153.2	255.3	425.5	-20~100	285	740	1480	2220	3705	6170	
50	19.2	50.1	100.2	150.4	250.6	417.7	200	260	680	1360	2035	3395	5655	
100	17.7	46.6	93.2	139.8	233.0	388.3	300	230	655	1310	1965	3270	5450	
150	15.8	45.1	90.2	135.2	225.4	375.6	400	200	635	1265	1900	3170	5280	
200	13.8	43.8	87.6	131.4	219.0	365.0	500	170	605	1205	1810	3015	5025	
250	12.1	41.9	83.9	125.8	209.7	349.5	600	140	570	1135	1705	2840	4730	
300	10.2	39.8	79.6	119.5	199.1	331.8	650	125	550	1100	1650	2745	4575	
325	9.3	38.7	77.4	116.1	193.6	322.6	700	110	530	1065	1590	2665	4425	
350	8.4	37.6	75.1	112.7	187.8	313.0	750	95	505	1015	1520	2535	4230	
375	7.4	36.4	72.7	109.1	181.8	303.1	800	80	410	825	1235	2055	3430	
400	6.5	34.7	69.4	104.2	173.6	289.3	850	65	320	640	955	1595	2655	
425	5.5	28.8	57.5	86.3	143.8	239.7	900	50	230	460	690	1150	1915	
450	4.6	23.0	46.0	69.0	115.0	191.7	950	35	135	275	410	685	1145	
475	3.7	17.4	34.9	52.3	87.2	145.3	1000	20	85	170	255	430	715	
500	2.8	11.8	23.5	35.3	58.8	97.9								
538	1.4	5.9	11.8	17.7	29.5	49.2								

C-32 Block and Bleed Valves


⦿ Ratings are taken from ASME B16.34, Table 2-2.8 and Table VII-2-2.8. The rating data are based on F53
(Not recommended for use above 315 °C).

Temp. (°C)	ASME Rating							Temp. (°F)	ASME Rating					
	150	300	600	900	1500	2500			150	300	600	900	1500	2500
	Working Pressure (bar)								Working Pressure (psig)					
-29~38	20.0	51.7	103.4	155.1	258.6	430.9		-20~100	290	750	1500	2250	3750	6250
50	19.5	51.7	103.4	155.1	258.6	430.9		200	260	745	1490	2230	3720	6200
100	17.7	50.7	101.3	152.0	253.3	422.2		300	230	665	1335	2000	3335	5560
150	15.8	45.9	91.9	137.8	229.6	382.7		400	200	615	1230	1845	3070	5120
200	13.8	42.7	85.3	128.0	213.3	355.4		500	170	580	1160	1740	2905	4840
250	12.1	40.5	80.9	121.4	202.3	337.2		600	140	555	1115	1670	2785	4640
300	10.2	38.9	77.7	116.6	194.3	323.8		650	125	545	1095	1640	2735	4560
325	9.3	38.2	76.3	114.5	190.8	318.0		700	110	540	1085	1625	2710	4520
350	8.4	37.6	75.3	112.9	188.2	313.7		750	95	530	1065	1595	2660	4430
375	7.4	37.4	74.7	112.1	186.8	311.3								
400	6.5	36.5	73.3	109.8	183.1	304.9								

Integral Type Flange Block and Bleed Valves

Features

- ⦿ Bore sizes: NPS 3/8~NPS 3/4 (DN10~DN20)
- ⦿ Flanges are forged integrally with the body
- ⦿ Smooth transition from the process piping system to instrumentation in a single configuration
- ⦿ Compact size and reduced weight minimize space envelope and support structure required
- ⦿ Easy to install
- ⦿ 1/2 female NPT standard vent with plug

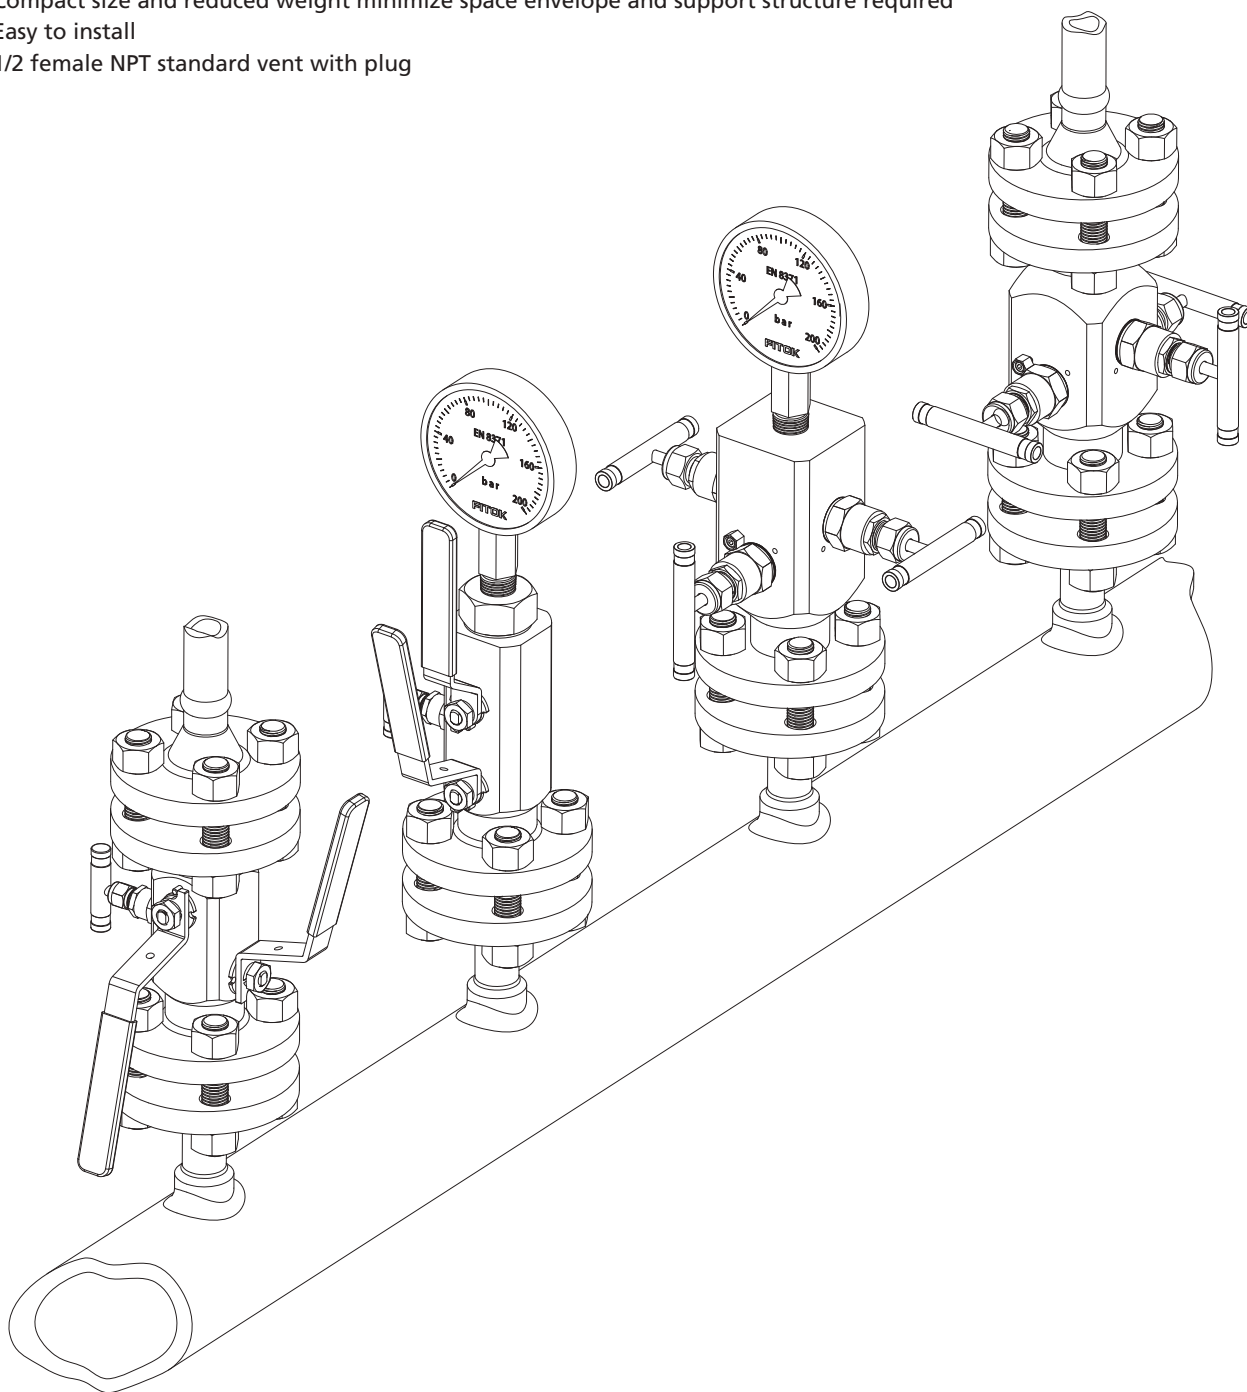


Valve Types and Dimensions

Double Block and Bleed Valves (DBB)


Configuration (BBN): ball isolate, ball isolate, needle vent  Connection: Flange+Flange

Basic Ordering Information	Inlet/Process Connection	Outlet/Instrument Connection	Bleed/Vent	Dimensions
DBB□□-□BBN□-FM□□□□-V8	RF Flange	RF Flange	1/2 Female NPT	See Tables 1-3
DBB□□-□BBN□-FJ□□□□-V8	RJ Flange	RJ Flange	1/2 Female NPT	

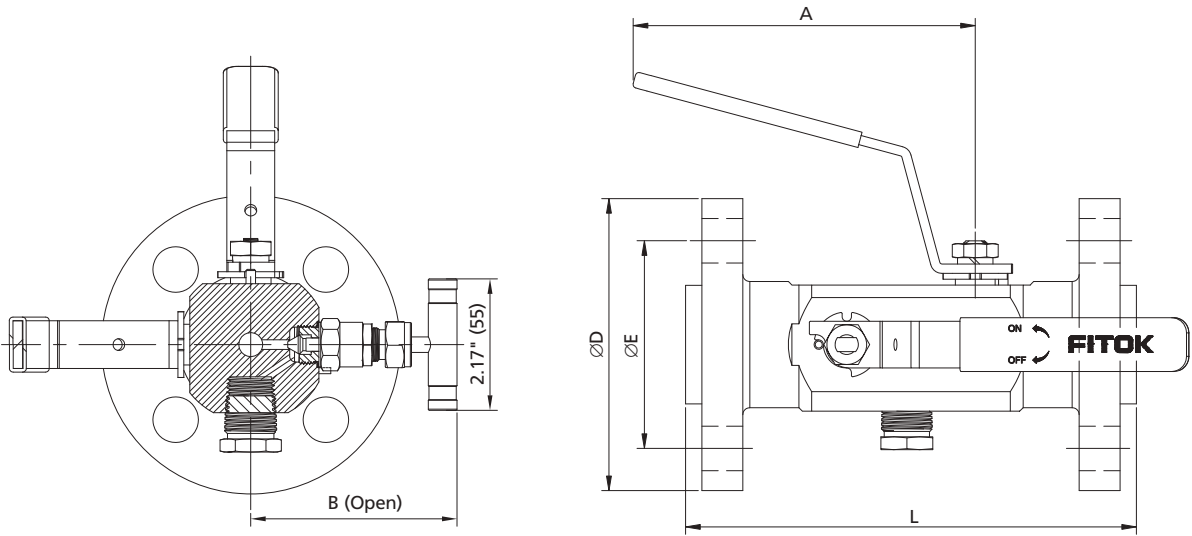


Configuration (BBN): ball isolate, ball isolate, needle vent  Connection: Flange+Thread

Basic Ordering Information	Inlet/Process Connection	Outlet/Instrument Connection	Bleed/Vent	Dimensions
DBB□□-□BBN□-FM□□□□-FNS□-V8	RF Flange	Female NPT	1/2 Female NPT	See Tables 1-3
DBB□□-□BBN□-FJ□□□□-FNS□-V8	RJ Flange	Female NPT	1/2 Female NPT	

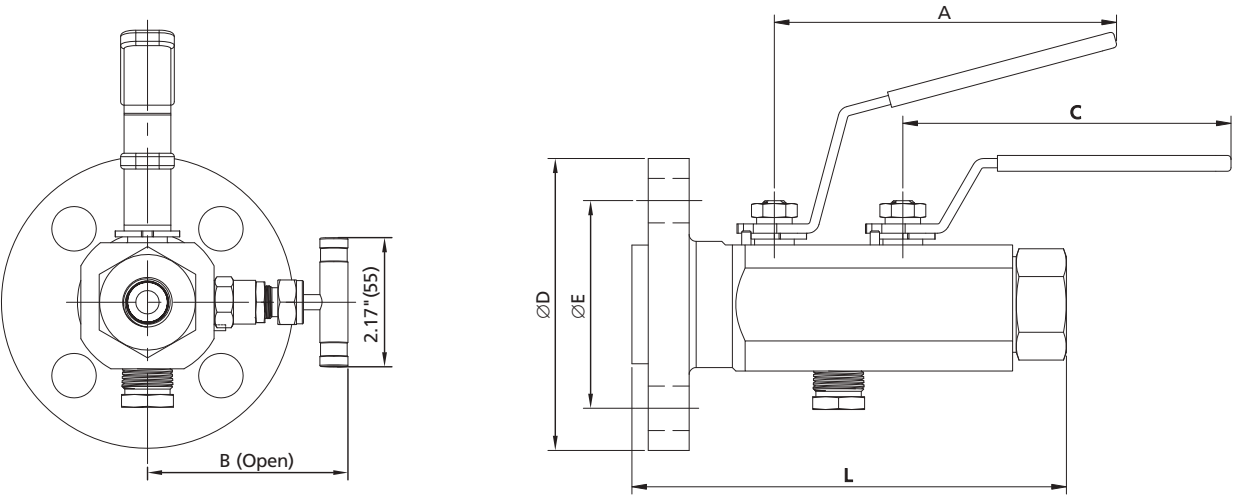


⦿ Configuration (NNN): needle isolate, needle isolate, needle vent  Connection: Flange+Flange

Basic Ordering Information	Inlet/Process Connection	Outlet/Instrument Connection	Bleed/Vent	Dimensions
DBB□□-2NNN-FM□□□□-V8	RF Flange	RF Flange	1/2 Female NPT	See Table 4
DBB□□-2NNN-FJ□□□□-V8	RJ Flange	RJ Flange	1/2 Female NPT	

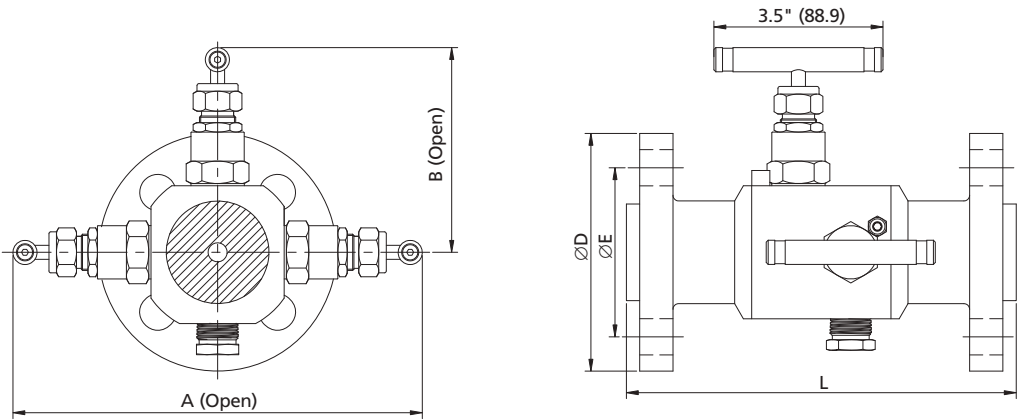

⦿ Configuration (NNN): needle isolate, needle isolate, needle vent  Connection: Flange+Thread

Basic Ordering Information	Inlet/Process Connection	Outlet/Instrument Connection	Bleed/Vent	Dimensions
DBB□□-2NNN-FM□□□□-FNS□-V8	RF Flange	Female NPT	1/2 Female NPT	See Table 4
DBB□□-2NNN-FJ□□□□-FNS□-V8	RJ Flange	Female NPT	1/2 Female NPT	

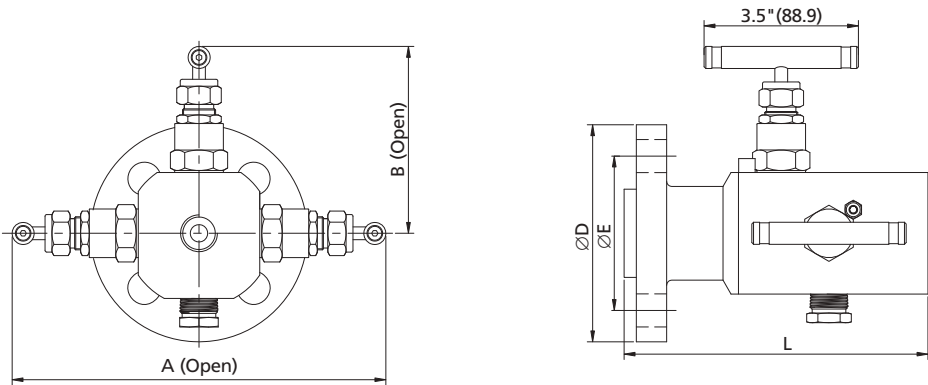

Manifolds

C-36 Block and Bleed Valves



Single Block and Bleed Valves (BB)

⦿ Configuration (BN): ball isolate, needle vent



Connection: Flange+Flange

Basic Ordering Information	Inlet/Process Connection	Outlet/Instrument Connection	Bleed/Vent	Dimensions
BB□□-□BN□-FM□□□□-V8	RF Flange	RF Flange	1/2 Female NPT	See Tables 1-3
BB□□-□BN□-FJ□□□□-V8	RJ Flange	RJ Flange	1/2 Female NPT	

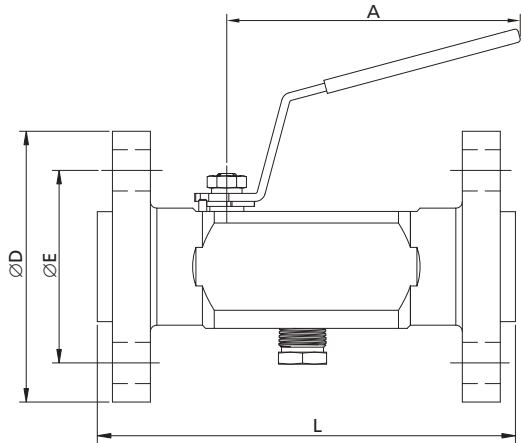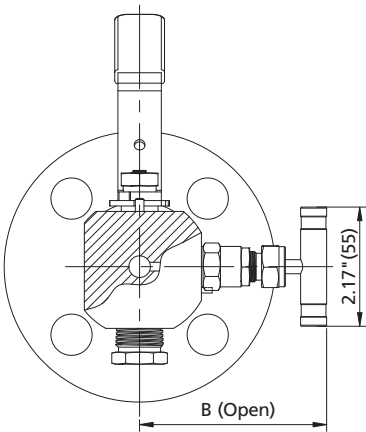

⦿ Configuration (BN): ball isolate, needle vent



Connection: Flange+Thread

Basic Ordering Information	Inlet/Process Connection	Outlet/Instrument Connection	Bleed/Vent	Dimensions
BB□□-□BN□-FM□□□□-FNS□-V8	RF Flange	Female NPT	1/2 Female NPT	See Tables 1-3
BB□□-□BN□-FJ□□□□-FNS□-V8	RJ Flange	Female NPT	1/2 Female NPT	

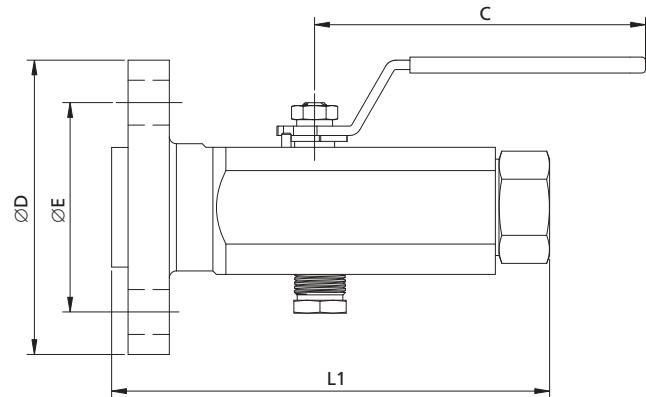
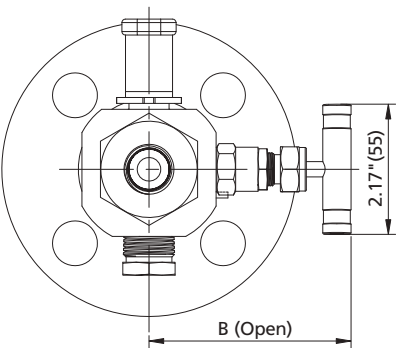


Table 1: Flange Options and Dimensions for 3/8 in. (9.5 mm) Bore Size (Ball/Needle)

Flange Size	ASME Class	Dimensions, in. (mm)								
		A	B	C	L			L1	ØD	ØE
					RF Flange	RJ Flange	Flange/NPT	Flange/NPT		
NPS1/2 (DN15)	150	5.75 (146)	3.48 (88.5)	5.51 (140)	6.41 (163)	6.41 (163)	6.61 (168)	4.72 (120)	3.54 (90)	2.37 (60.3)
	300				6.81 (173)	6.81 (173)	7.09 (180)	5.12 (130)	3.74 (95)	2.63 (66.7)
	600						7.32 (186)	5.35 (136)		
	900/1500				7.99 (203)	7.99 (203)	7.87 (200)	5.91 (150)	4.72 (120)	3.25 (82.6)
	2500						7.99 (203)	6.22 (158)	5.31 (135)	3.50 (88.9)
NPS3/4 (DN20)	150				6.41 (163)	6.41 (163)	6.89 (175)	5.04 (128)	3.94 (100)	2.75 (69.9)
	300				6.81 (173)	6.81 (173)	7.20 (183)	5.24 (133)	4.53 (115)	3.25 (82.6)
	600						7.40 (188)	5.43 (138)		
	900/1500				7.99 (203)	7.99 (203)	7.95 (202)	5.98 (152)	5.12 (130)	3.50 (88.9)
	2500						8.19 (208)	6.22 (158)	5.51 (140)	3.75 (95.2)
NPS1 (DN25)	150				6.41 (163)	6.41 (163)	6.89 (175)	5.12 (130)	4.33 (110)	3.13 (79.4)
	300				7.01 (178)	7.01 (178)	7.09 (180)		4.92 (125)	3.50 (88.9)
	600				7.60 (193)	7.60 (193)	7.32 (186)	5.35 (136)		
	900/1500				10.3 (261)	10.3 (261)	8.07 (205)	6.10 (155)	5.91 (150)	4.00 (101.6)
	2500				10.6 (273)	10.6 (273)	8.35 (212)	6.38 (162)	6.30 (160)	4.25 (108.0)
NPS1-1/2 (DN40)	150				8.90 (226)	8.90 (226)	7.01 (178)	4.96 (126)	4.92 (125)	3.87 (98.4)
	300				9.89 (251)	9.89 (251)	7.28 (185)	5.31 (135)	6.10 (155)	4.50 (114.3)
	600						7.60 (193)	5.63 (143)		
	900/1500				11.5 (291)	11.5 (291)	8.31 (211)	6.34 (161)	7.09 (180)	4.87 (123.8)
	2500				12.4 (316)	12.4 (316)	8.86 (225)	6.89 (175)	8.07 (205)	5.75 (146)
NPS2 (DN50)	150				9.09 (231)	9.09 (231)	7.01 (178)	5.24 (133)	5.91 (150)	4.75 (120.7)
	300				10.1 (256)	10.1 (256)	7.48 (190)	5.51 (140)	6.49 (165)	5.00 (127.0)
	600						7.83 (199)	5.87 (149)		
	900/1500				12.0 (306)	12.0 (306)	8.78 (223)	6.81 (173)	8.46 (215)	6.50 (165.1)
	2500				13.6 (346)	13.6 (346)	9.06 (230)	7.09 (180)	9.25 (235)	6.75 (171.4)

Table 2: Flange Options and Dimensions for 1/2 in. (14 mm) Bore Size (Ball/Needle)

Dimensions, in. (mm)										
Flange Size	ASME Class	A	B	C	L			L1	ØD	ØE
					RF Flange	RJ Flange	Flange/NPT	Flange/NPT		
NPS1 (DN25)	150	6.73 (171)	3.68 (93.5)	6.5 (165)	9.10 (231)	9.10 (231)	8.54 (217)	5.87 (149)	4.33 (110)	3.13 (79.4)
	300				9.49 (241)	9.49 (241)	8.66 (220)	5.98 (152)	4.92 (125)	3.50 (88.9)
	600						8.74 (222)	6.06 (154)		
	900/1500				10.3 (261)	10.3 (261)	9.53 (242)	6.85 (174)	5.91 (150)	4.00 (101.6)
	2500				10.7 (273)	10.7 (273)	9.80 (249)	7.13 (181)	6.30 (160)	4.25 (108.0)
NPS1-1/2 (DN40)	150				9.49 (241)	9.49 (241)	8.07 (205)	5.87 (149)	4.92 (125)	3.87 (98.4)
	300				9.89 (251)	9.89 (251)	8.74 (222)	6.06 (154)	6.10 (155)	4.50 (114.3)
	600						9.02 (229)	6.34 (161)		
	900/1500				11.5 (291)	11.5 (291)	9.61 (244)	6.93 (176)	7.09 (180)	4.87 (123.8)
	2500				12.4 (316)	12.4 (316)	10.2 (259)	7.52 (191)	8.07 (205)	5.75 (146)
NPS2 (DN50)	150				9.49 (241)	9.49 (241)	8.15 (207)	5.91 (150)	5.91 (150)	4.75 (120.7)
	300				10.3 (261)	10.3 (261)	8.46 (215)	6.06 (154)	6.49 (165)	5.00 (127.0)
	600						8.86 (225)	6.93 (176)		
	900/1500				12.0 (306)	12.0 (306)	9.61 (244)	7.09 (180)	8.46 (215)	6.50 (165.1)
	2500				13.6 (346)	13.6 (346)	10.1 (256)	7.60 (193)	9.25 (235)	6.75 (171.4)

C-38 Block and Bleed Valves

Table 3: Flange Options and Dimensions for 3/4 in. (20 mm) Bore Size (Ball/Needle)

Dimensions, in. (mm)										
Flange Size	ASME Class	A	B	C	L			L1	ØD	ØE
					RF Flange	RJ Flange	Flange/NPT	Flange/NPT		
NPS1-1/2 (DN40)	150	6.73 (171)	3.88 (98.5)	6.5 (165)	8.94 (227)	8.94 (227)	9.13 (232)	6.3 (160)	4.92 (125)	3.87 (98.4)
	300				9.41 (239)	9.41 (239)	9.41 (239)	6.57 (167)	6.10 (155)	4.50 (114.3)
	600				10.04 (255)	10.04 (255)	9.69 (246)	6.85 (174)		
	900/1500				12.05 (306)	12.05 (306)	10.39 (264)	7.56 (192)	7.09 (180)	4.87 (123.8)
	2500				12.99 (330)	12.99 (330)	10.87 (276)	8.03 (204)	8.07 (205)	5.75 (146)
NPS2 (DN50)	150				8.86 (225)	8.86 (225)	9.06 (230)	6.22 (158)	5.91 (150)	4.75 (120.7)
	300				9.37 (238)	9.37 (238)	9.33 (237)	6.49 (165)	6.49 (165)	5.00 (127.0)
	600				10.24 (260)	10.24 (260)	9.61 (244)	6.77 (172)		
	900/1500				12.60 (320)	12.60 (320)	11.02 (280)	7.64 (194)	8.46 (215)	6.50 (165.1)
	2500				13.7 (348)	13.7 (348)	11.42 (290)	8.27 (210)	9.25 (235)	6.75 (171.4)

Table 4: Flange Options and Dimensions for 3/8 in. (9.5 mm) Bore Size (Needle)

Flange Size	ASME Class	Dimensions, in. (mm)						
		A	B	L			ØD	ØE
				RF Flange	RJ Flange	Flange/NPT		
NPS1/2 (DN15)	150	9.17 (233)	4.59 (116.5)	6.89 (175)	6.89 (175)	6.10 (155)	3.54 (90)	2.37 (60.3)
	300			7.28 (185)	7.28 (185)	6.30 (160)	3.74 (95)	2.63 (66.7)
	600			8.46 (215)	8.46 (215)	6.89 (175)	4.72 (120)	3.25 (82.6)
	900/1500			9.25 (235)	9.25 (235)	7.28 (185)	5.31 (135)	3.50 (88.9)
	2500			6.89 (175)	6.89 (175)	6.10 (155)	3.94 (100)	2.75 (69.9)
NPS3/4 (DN20)	150			7.28 (185)	7.28 (185)	6.30 (160)	4.53 (115)	3.25 (82.6)
	300			7.87 (200)	7.87 (200)	6.69 (170)		
	600			8.66 (225)	8.66 (225)	7.09 (180)	5.12 (130)	3.50 (88.9)
	900/1500			9.45 (240)	9.45 (240)	7.48 (190)	5.51 (140)	3.75 (95.2)
	2500			6.89 (175)	6.89 (175)	6.10 (155)	4.33 (110)	3.13 (79.4)
NPS1 (DN25)	150			7.28 (185)	7.28 (185)	6.30 (160)	4.92 (125)	3.50 (88.9)
	300			8.07 (205)	8.07 (205)	6.89 (175)		
	600			10.04 (255)	10.04 (255)	7.68 (195)	5.91 (150)	4.00 (101.6)
	900/1500			10.24 (260)	10.24 (260)	7.87 (200)	6.30 (160)	4.25 (108.0)
	2500			7.09 (180)	7.09 (180)	6.30 (160)	4.92 (125)	3.87 (98.4)
NPS1-1/2 (DN40)	150			8.67 (220)	8.67 (220)	6.89 (175)	6.10 (155)	4.50 (114.3)
	300			8.86 (225)	8.86 (225)	7.28 (185)		
	600			10.43 (265)	10.43 (265)	7.87 (200)	7.09 (180)	4.87 (123.8)
	900/1500			12.20 (310)	12.20 (310)	8.86 (225)	8.07 (205)	5.75 (146)
	2500			7.68 (195)	7.68 (195)	6.69 (170)	5.91 (150)	4.75 (120.7)
NPS2 (DN50)	150			8.67 (220)	8.67 (220)	7.09 (180)	6.49 (165)	5.00 (127.0)
	300			9.06 (230)	9.06 (230)	7.48 (190)		
	600			11.42 (290)	11.42 (290)	8.67 (220)	8.46 (215)	6.50 (165.1)
	900/1500			12.60 (320)	12.60 (320)	9.06 (230)	9.25 (235)	6.75 (171.4)
	2500							

Ordering Number Description

DBBSS - 1BBN1 - FM16300 - FNS8 - V8 - GSF2 - IE

Series (Function)	Body Material	Needle Valve Bore Size	Configuration	Ball Valve Bore Size	Inlet Type	Inlet Size	Pressure Ratings	Outlet Type	Outlet Size	Vent Type and Size	Packing/ Sealing Material	Special Application	Cleaning and Packaging	Special Function
SS 316 SS	4 mm	Config-uration	Primary Isolate	Secondary Isolate	Bleed	FM RF Flange		Same as inlet	Same as inlet	V4 1/4 Female NPT with plug		No	No	
6L 316L SS	1 6.4 mm	BBN Ball	Ball	Ball	Needle	FJ RJ Flange	150 Class 150	FNS Female NPT	6 3/8"	V8 1/2 Female NPT with plug		S NACE MR 0175	I Fire safe	
CS Carbon Steel	2 9.5 mm	BBO Ball	Ball	Ball	OS&Y		300 Class 300	NS Male NPT	8 1/2"				IE Fire safe and anti-static	
D7 Duplex 2507		NNN Needle	Needle	Needle	Needle	8 1/2"	600 Class 600		12 3/4"		PTFE	FC-01		
DBB Double Block and Bleed		BN Ball	—	—	Needle	12 3/4"	900 Class 900		16 1"		G Graphite	F2 FC-02		
BB Single Block and Bleed		BO Ball	—	—	OS&Y	16 1"	1500 Class 1500		24 1 1/2"		Not an option for fire safe design			
			No Ball Valve Configuration			20 1 1/4"	2500 Class 2500		32 2"					
		1 14 mm				24 1 1/2"	EN Flange (PN Series)							
		2 20 mm				32 2"	6 PN 6							
							10 PN 10							
							16 PN 16							
							25 PN 25							
							40 PN 40							
							63 PN 63							
							100 PN 100							
							160 PN 160							

1. For more information about hazards and risks of oxygen-enriched system, please contact FITOK Group or our authorized distributors.

2. Cleaning and Packaging:


2.1 FC-01: Standard cleaning and packaging for general industrial procedures.

2.2 FC-02: Special cleaning and packaging for wetted system components to ensure compliance with product cleanliness requirement as stated in ASTM G93 Level C.

Split Type Flang Block and Bleed Valves

Features

- ⦿ Bore size: NPS 3/8~NPS 2 (DN10~DN50)
- ⦿ 3-piece, bolted body construction
- ⦿ Optional fire-safe and anti-static design
- ⦿ 1/2 female NPT standard vent with plug

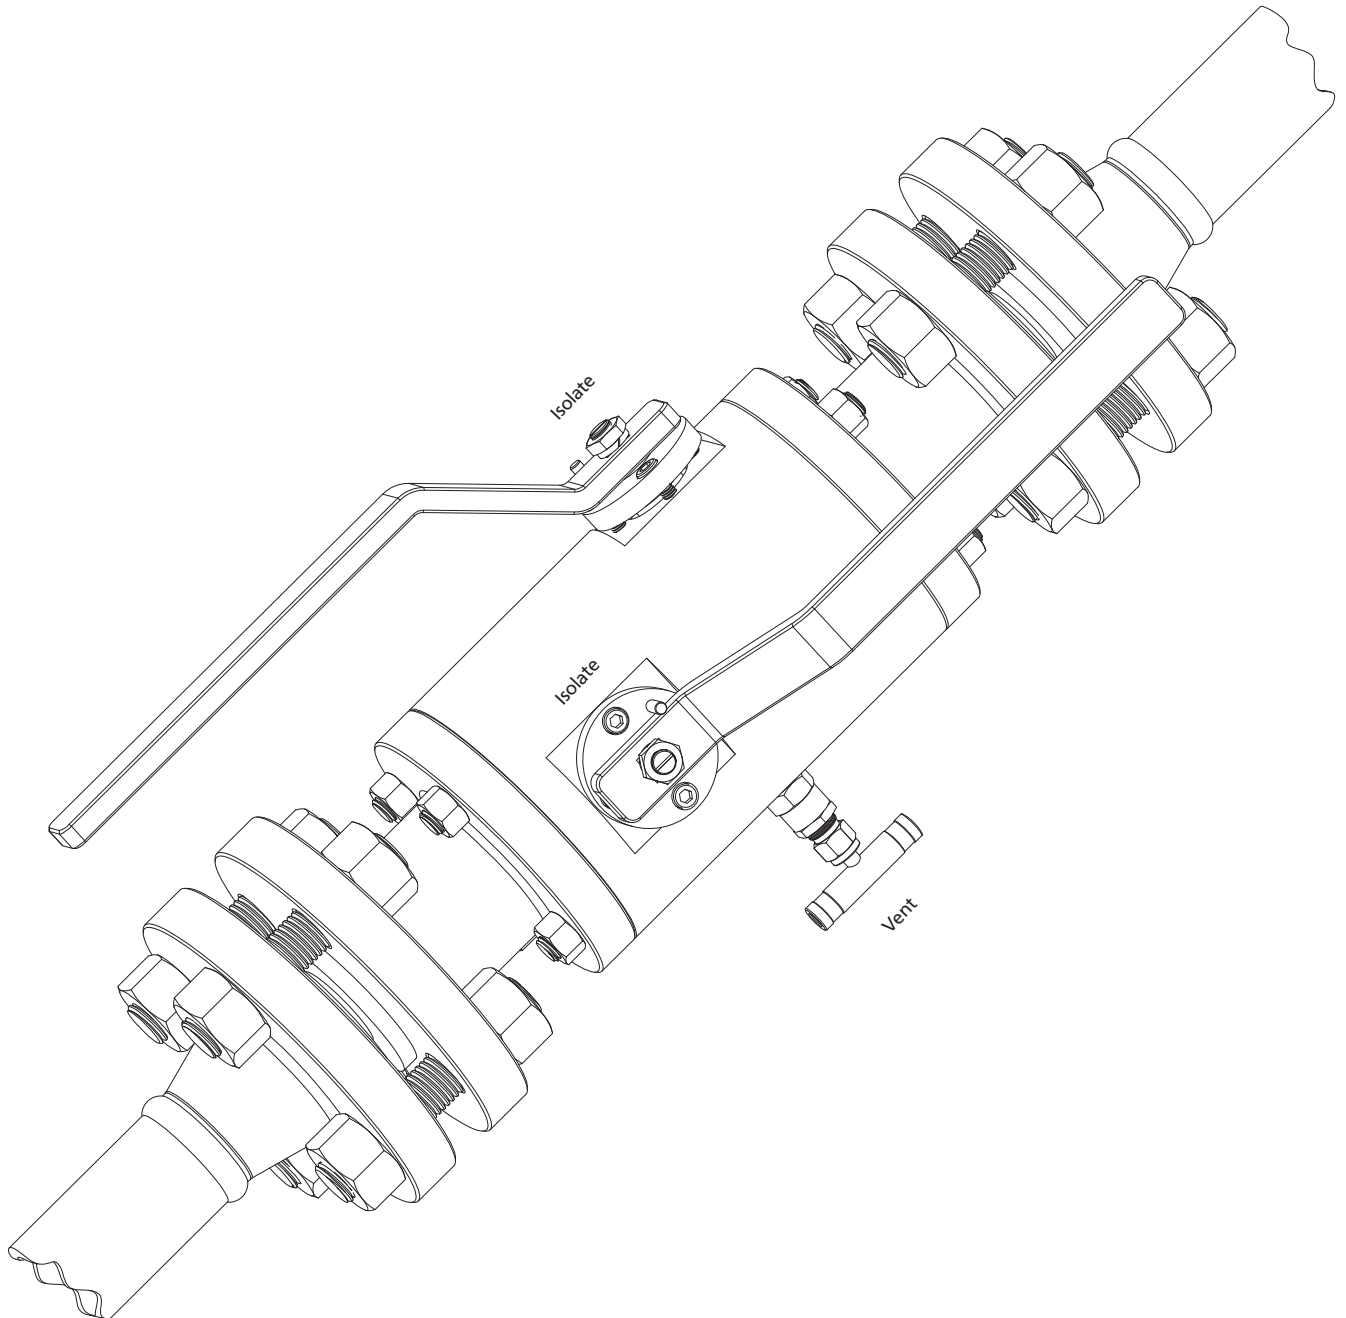

Valve Types and Dimensions

Double Block and Bleed Valves (DBB)

© Configuration (BBN): ball isolate, ball isolate, needle vent



Connection: Flange+Flange

Basic Ordering Information	Inlet/Process Connection	Outlet/Instrument Connection	Bleed/Vent	Dimensions
DBB□□-□BBN□-FM□□□□-V8-FS-I	RF Flange	RF Flange	1/2 Female NPT	See Tables 8-12
DBB□□-□BBN□-FJ□□□□-V8-FS-I	RJ Flange	RJ Flange	1/2 Female NPT	

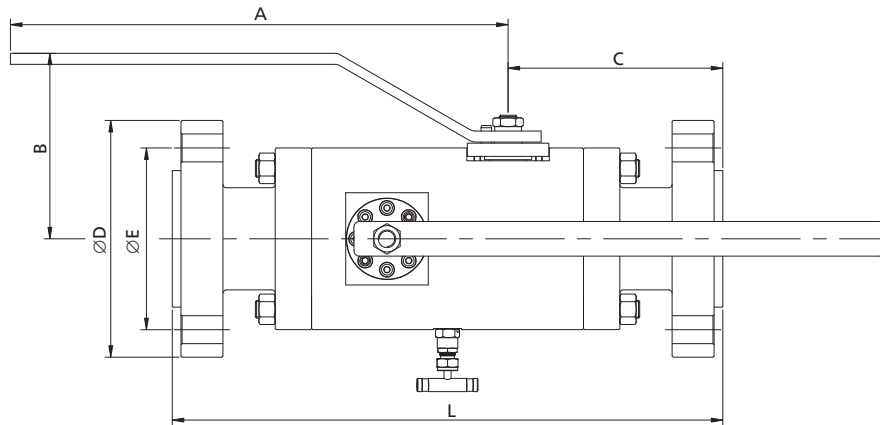


Table 8: Flange Options and Dimensions for 3/8 in. (9.5 mm) Bore Size (Ball/Needle)

Flange Size	ASME Class	Dimensions, in. (mm)						
		A	B	C	L		ØD	ØE
					RF Flange	RJ Flange		
NPS1/2 (DN15)	150	8.62 (219)	4.37 (134)	4.37 (111)	11.10 (282)	-	3.54 (90)	2.37 (60.3)
	300			4.49 (114)	11.34 (288)	11.57 (294)	3.74 (95)	2.63 (66.7)
	600			4.76 (121)	11.89 (302)	11.89 (302)		
	900/1500			5.31 (135)	12.99 (330)	12.99 (330)	4.72 (120)	3.25 (82.6)
	2500			5.63 (143)	13.62 (346)	13.62 (346)	5.31 (135)	3.50 (88.9)
NPS3/4 (DN20)	150			4.45 (113)	11.26 (286)	-	3.94 (100)	2.75 (69.9)
	300			4.65 (118)	11.65 (296)	11.65 (296)	4.53 (115)	3.25 (82.6)
	600			4.92 (125)	12.20 (310)	12.20 (310)		
	900/1500			5.43 (138)	13.23 (336)	13.23 (336)	5.12 (130)	3.50 (88.9)
	2500			5.71 (145)	13.78 (350)	13.78 (350)	5.51 (140)	3.75 (95.2)
NPS1 (DN25)	150			4.49 (114)	11.34 (288)	11.34 (288)	4.33 (110)	3.13 (79.4)
	300			4.72 (120)	11.81 (300)	11.81 (300)		
	600			4.96 (126)	12.28 (312)	12.28 (312)	4.92 (125)	3.50 (88.9)
	900/1500			5.71 (145)	13.78 (350)	13.78 (350)	5.91 (150)	4.00 (101.6)
	2500			5.98 (152)	14.33 (364)	14.33 (364)	6.30 (160)	4.25 (108.0)
NPS1-1/2 (DN40)	150			4.65 (118)	11.65 (296)	11.65 (296)	4.92 (125)	3.87 (98.4)
	300			5.0 (127)	12.36 (314)	12.36 (314)		
	600			5.31 (135)	12.99 (330)	12.99 (330)	6.10 (155)	4.50 (114.3)
	900/1500	7.44 (189)	7.05 (179)	5.98 (152)	14.33 (364)	14.33 (364)		
	2500			6.57 (167)	15.51 (394)	15.67 (398)	8.07 (205)	5.75 (146)
NPS2 (DN50)	150	8.62 (219)	4.37 (134)	4.76 (121)	11.89 (302)	11.89 (302)	5.91 (150)	4.75 (120.7)
	300			4.88 (124)	12.13 (308)	12.28 (312)		
	600			5.28 (134)	12.91 (328)	13.07 (332)	6.49 (165)	5.00 (127.0)
	900/1500	7.44 (189)	7.05 (179)	6.22 (155)	14.57 (370)	14.72 (374)	8.46 (215)	6.50 (165.1)
	2500			6.69 (170)	15.75 (400)	15.91 (404)	9.25 (235)	6.75 (171.4)

Table 9: Flange Options and Dimensions for 1/2 in. (14 mm) Bore Size (Ball/Needle)

Flange Size	ASME Class	Dimensions, in. (mm)						
		A	B	C	L		ØD	ØE
					RF Flange	RJ Flange		
NPS1/2 (DN15)	150	8.62 (219)	4.37 (134)	4.37 (111)	11.10 (282)	-	3.54 (90)	2.37 (60.3)
	300			4.49 (114)	11.34 (288)	11.57 (294)	3.74 (95)	2.63 (66.7)
	600			4.76 (121)	11.89 (302)	11.89 (302)		
	900/1500			5.31 (135)	12.99 (330)	12.99 (330)	4.72 (120)	3.25 (82.6)
	2500			5.63 (143)	13.62 (346)	13.62 (346)	5.31 (135)	3.50 (88.9)
NPS3/4 (DN20)	150			4.45 (113)	11.26 (286)	-	3.94 (100)	2.75 (69.9)
	300			4.65 (118)	11.65 (296)	11.65 (296)	4.53 (115)	3.25 (82.6)
	600			4.92 (125)	12.20 (310)	12.20 (310)		
	900/1500			5.43 (138)	13.23 (336)	13.23 (336)	5.12 (130)	3.50 (88.9)
	2500			5.71 (145)	13.78 (350)	13.78 (350)	5.51 (140)	3.75 (95.2)
NPS1 (DN25)	150			4.49 (114)	11.34 (288)	11.34 (288)	4.33 (110)	3.13 (79.4)
	300			4.72 (120)	11.81 (300)	11.81 (300)	4.92 (125)	3.50 (88.9)
	600			4.96 (126)	12.28 (312)	12.28 (312)		
	900/1500			5.71 (145)	13.78 (350)	13.78 (350)	5.91 (150)	4.00 (101.6)
	2500			5.98 (152)	14.33 (364)	14.33 (364)	6.30 (160)	4.25 (108.0)
NPS1-1/2 (DN40)	150			4.65 (118)	11.65 (296)	11.65 (296)	4.92 (125)	3.87 (98.4)
	300			5.0 (127)	12.36 (314)	12.36 (314)	6.10 (155)	4.50 (114.3)
	600			5.31 (135)	12.99 (330)	12.99 (330)		
	900/1500	7.44 (189)	7.05 (179)	5.98 (152)	14.33 (364)	14.33 (364)	7.09 (180)	4.87 (123.8)
	2500			6.57 (167)	15.51 (394)	15.67 (398)	8.07 (205)	5.75 (146)
NPS2 (DN50)	150	8.62 (219)	4.37 (134)	4.76 (121)	11.89 (302)	11.89 (302)	5.91 (150)	4.75 (120.7)
	300			4.88 (124)	12.13 (308)	12.28 (312)	6.49 (165)	5.00 (127.0)
	600			5.28 (134)	12.91 (328)	13.07 (332)		
	900/1500	7.44 (189)	7.05 (179)	6.22 (155)	14.57 (370)	14.72 (374)	8.46 (215)	6.50 (165.1)
	2500			6.69 (170)	15.75 (400)	15.91 (404)	9.25 (235)	6.75 (171.4)

Table 10: Flange Options and Dimensions for 3/4 in. (20 mm) Bore Size (Ball/Needle)

Flange Size	ASME Class	Dimensions, in. (mm)						
		A	B	C	L		ØD	ØE
					RF Flange	RJ Flange		
NPS3/4 (DN20)	150	9.53 (242)	4.37 (111)	4.53 (115)	11.42 (290)	-	3.94 (100)	2.75 (69.9)
	300			4.72 (120)	11.81 (300)	12.20 (310)	4.53 (115)	3.25 (82.6)
	600			5.0 (127)	12.36 (314)	12.36 (314)		
	900/1500			5.51 (140)	13.39 (340)	13.39 (340)	5.12 (130)	3.50 (88.9)
	2500			5.79 (147)	13.94 (354)	13.94 (354)	5.51 (140)	3.75 (95.2)
NPS1 (DN25)	150			4.61 (117)	11.57 (294)	11.57 (294)	4.33 (110)	3.13 (79.4)
	300			4.80 (122)	11.97 (304)	11.97 (304)	4.92 (125)	3.50 (88.9)
	600			5.08 (129)	12.52 (318)	12.52 (318)		
	900/1500			5.83 (148)	14.02 (356)	14.02 (356)	5.91 (150)	4.00 (101.6)
	2500			6.1 (155)	14.57 (370)	14.57 (370)	6.30 (160)	4.25 (108.0)
NPS1-1/2 (DN40)	150		6.34 (161)	4.72 (120)	11.81 (300)	11.81 (300)	4.92 (125)	3.87 (98.4)
	300			5.12 (130)	12.6 (320)	12.6 (320)	6.10 (155)	4.50 (114.3)
	600			5.43 (138)	13.31 (338)	13.31 (338)		
	900/1500			6.06 (154)	14.49 (368)	14.49 (368)	7.09 (180)	4.87 (123.8)
	2500			6.70 (170)	15.75 (400)	15.87 (403)	8.07 (205)	5.75 (146)
NPS2 (DN50)	150		4.37 (111)	4.88 (124)	12.13 (308)	12.13 (308)	5.91 (150)	4.75 (120.7)
	300			5.0 (127)	12.36 (314)	12.52 (318)	6.49 (165)	5.00 (127.0)
	600			5.39 (137)	13.15 (334)	13.31 (338)		
	900/1500		6.34 (161)	6.22 (158)	14.8 (376)	14.96 (380)	8.46 (215)	6.50 (165.1)
	2500			6.81 (173)	15.98 (406)	16.14 (410)	9.25 (235)	6.75 (171.4)

C-44 Block and Bleed Valves

Table 11: Flange Options and Dimensions for 1-1/2 in. (38.1 mm) Bore Size (Ball/Needle)


Flange Size	ASME Class	Dimensions, in. (mm)						
		A	B	C	L		ØD	ØE
					RF Flange	RJ Flange		
NPS1-1/2 (DN40)	150	10.7 (272)	5.28 (134)	5.43 (138)	14.2 (361)	14.7 (374)	4.92 (125)	3.87 (98.4)
	300			5.55 (141)	14.4 (367)	14.88 (378)	6.10 (155)	4.50 (114.3)
	600			5.87 (149)	15.12 (384)	15.12 (384)		
	900/1500		6.61 (168)	6.22 (158)	16.8 (402)	16.14 (410)	7.09 (180)	4.87 (123.8)
NPS2 (DN50)	150		5.28 (134)	5.47 (139)	14.3 (364)	14.8 (377)	5.91 (150)	4.75 (120.7)
	300			5.63 (143)	14.6 (372)	15.04 (382)	6.49 (165)	5.00 (127.0)
	600			5.98 (132)	15.4 (390)	15.5 (393)		
	900/1500		6.61 (168)	6.50 (165)	16.3 (415)	16.5 (418)	8.46 (215)	6.50 (165.1)

Table 12: Flange Options and Dimensions for 2 in. (50.8 mm) Bore Size (Ball/Needle)

Flange Size	ASME Class	Dimensions, in. (mm)						
		A	B	C	L		ØD	ØE
					RF Flange	RJ Flange		
NPS2 (DN50)	150	17.80 (452)	6.63 (169)	5.94 (151)	15.35 (390)	15.8 (403)	5.91 (150)	4.75 (120.7)
	300			6.10 (155)	15.67 (398)	15.67 (398)	6.49 (165)	5.00 (127.0)
	600			6.38 (162)	16.38 (416)	16.5 (419)		
	900/1500			7.68 (195)	19.69 (500)	19.69 (500)	8.46 (215)	6.50 (165.1)
NPS3 (DN80)	150			6.14 (156)	15.7 (400)	16.3 (413)	7.48 (190)	6.0 (152.4)
	300			6.34 (161)	16.1 (410)	16.1 (410)	8.27 (210)	6.63 (168.3)
	600			6.61 (168)	16.9 (428)	17.0 (431)		
	900			7.68 (195)	19.69 (500)	19.69 (500)	9.45 (240)	7.50 (190.5)
	1500			8.27 (210)	20.87 (530)	20.87 (530)	10.43 (265)	8.0 (203.2)

Ordering Number Description

DBBSS - 1BBN1 - FM16300 - FNS8 - V8 - FGSF2 - IE

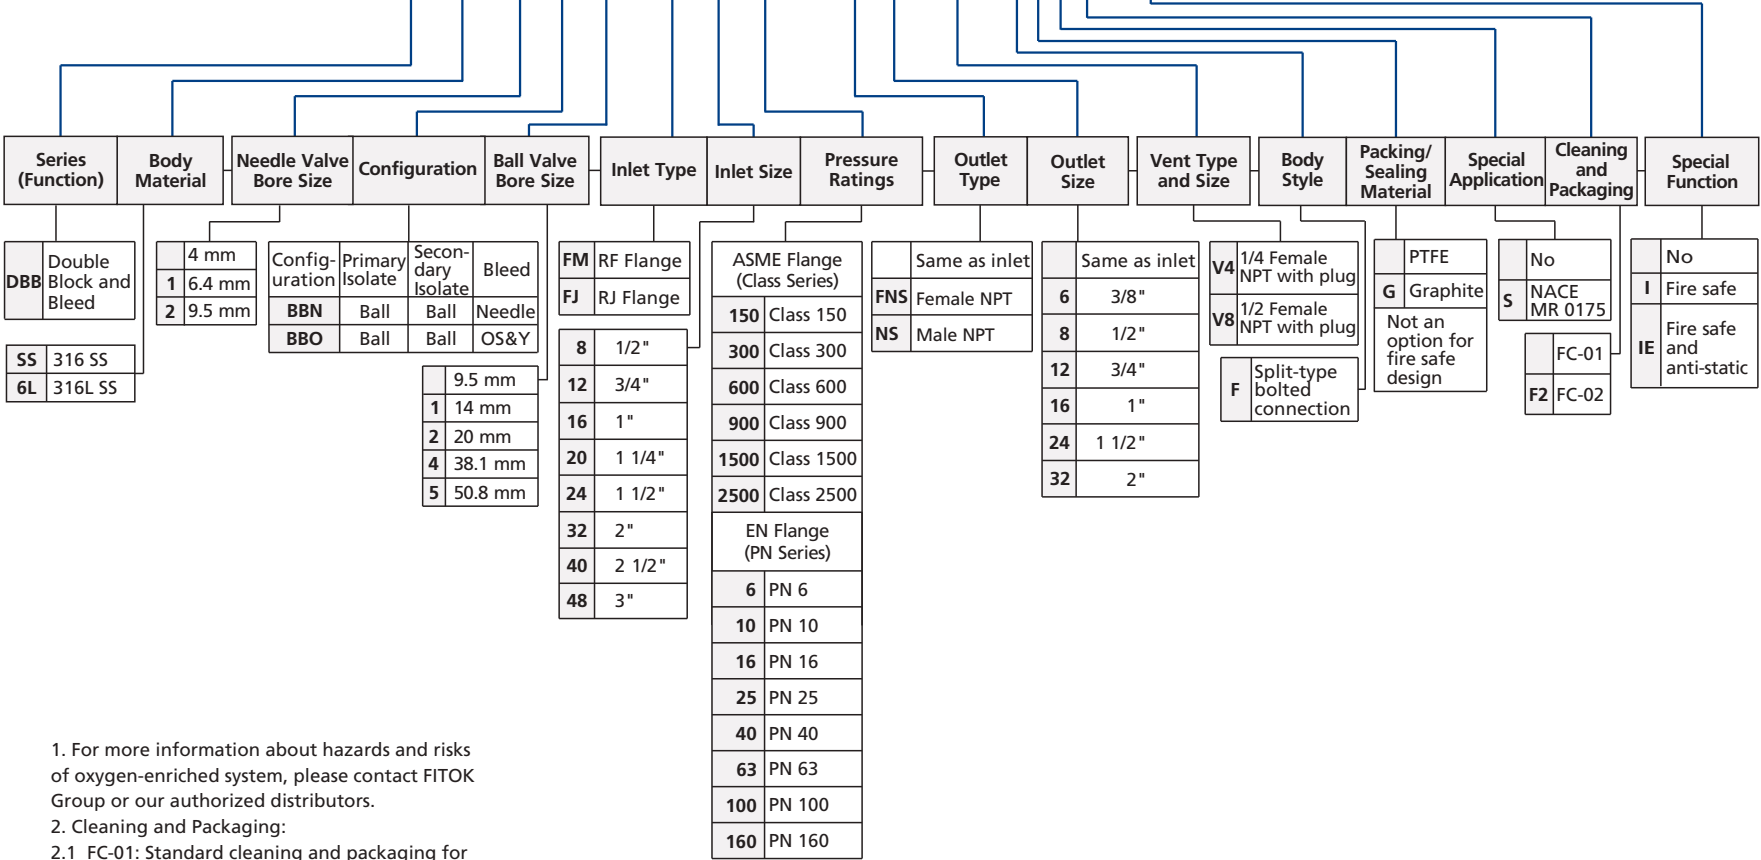


1. For more information about hazards and risks of oxygen-enriched system, please contact FITOK Group or our authorized distributors.
2. Cleaning and Packaging:
2.1 FC-01: Standard cleaning and packaging for general industrial procedures.
2.2 FC-02: Special cleaning and packaging for wetted system components to ensure compliance with product cleanliness requirement as stated in ASTM G93 Level C.

Wafer Type Flange Block and Bleed Valves

Features

- ⦿ Smooth transition from the process piping system to instrumentation in a single configuration
- ⦿ 1/2 female NPT standard outlet
- ⦿ 1/2 female NPT standard vent with plug

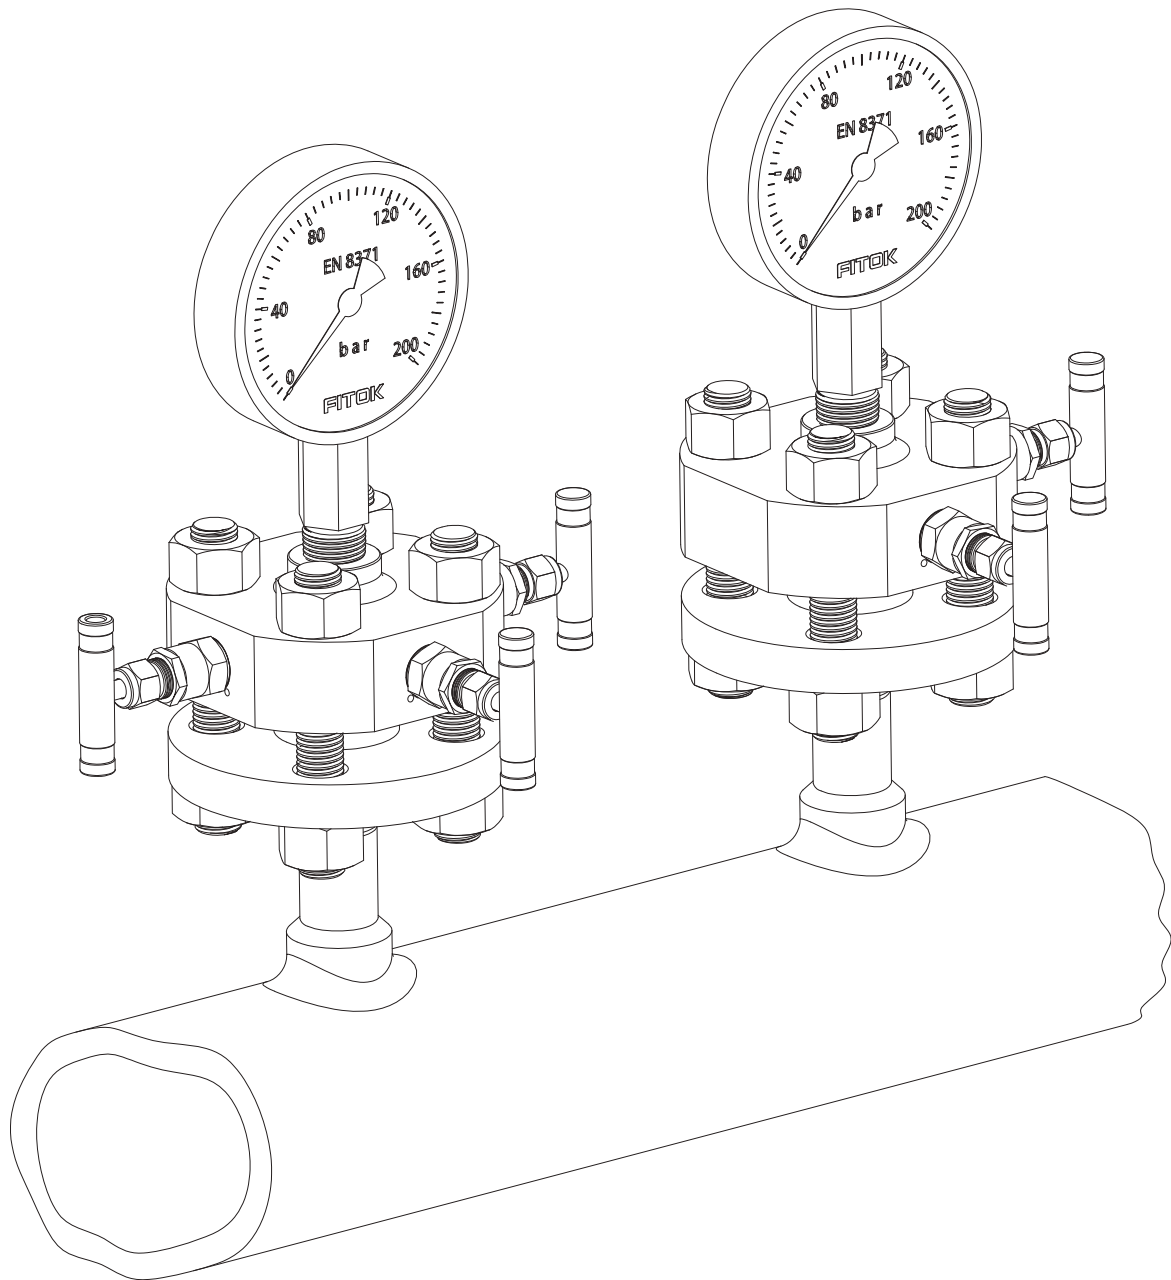


Types and Dimensions

Double Block and Bleed Valves (DBB)

Configuration (NNN): needle isolate, needle isolate, needle vent

Connection: Flange+Thread


Basic Ordering Information	Inlet/Process Connection	Outlet/Instrument Connection	Bleed/Vent	Dimensions
DBB□□-NNN-MM□□□□-FNS8-V8	RF Flange	1/2 Female NPT	1/2 Female NPT	See Table 13
DBB□□-NNN-MJ□□□□-FNS8-V8	RJ Flange	1/2 Female NPT	1/2 Female NPT	

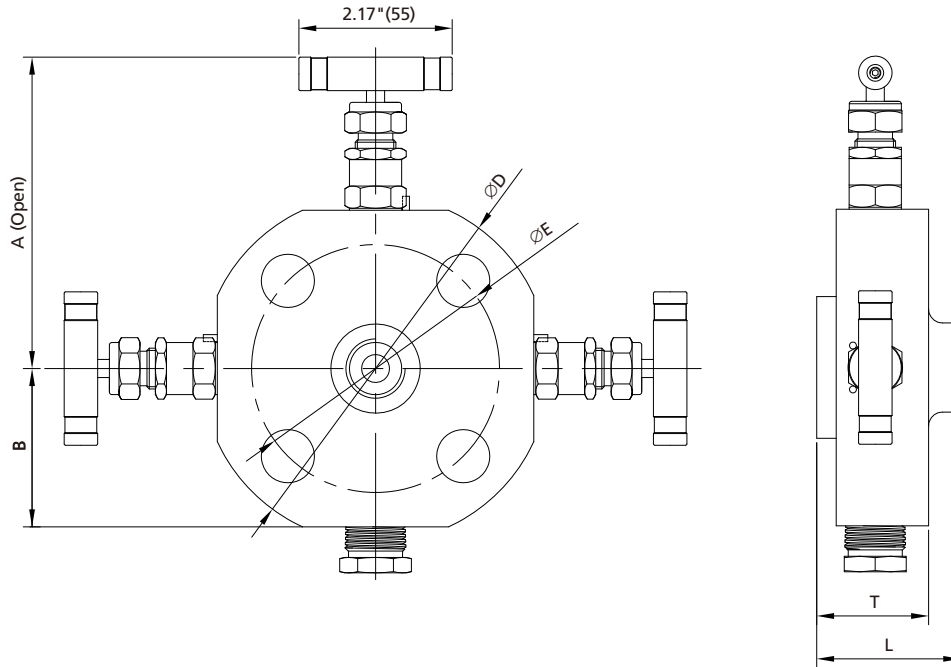

Configuration (ONN): OS&Y isolate, needle isolate, needle vent

Connection: Flange+Thread


Basic Ordering Information	Inlet/Process Connection	Outlet/Instrument Connection	Bleed/Vent	Dimensions
DBB□□-ONN-MM□□□□-FNS8-V8	RF Flange	1/2 Female NPT	1/2 Female NPT	See Table 14
DBB□□-ONN-MJ□□□□-FNS8-V8	RJ Flange	1/2 Female NPT	1/2 Female NPT	

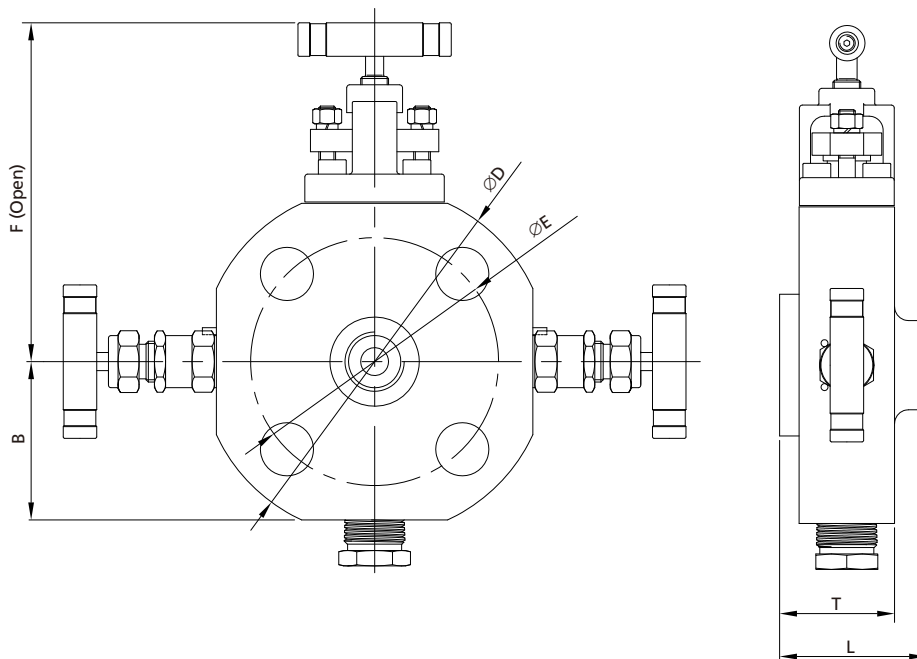

Single Block and Bleed Valves (BB)


⊙ Configuration (NN): needle isolate, needle vent  Connection: Flange+Thread

Basic Ordering Information	Inlet/Process Connection	Outlet/Instrument Connection	Bleed/Vent	Dimensions
BB□□-NN-MM□□□□-FNS8-V8	RF Flange	1/2 Female NPT	1/2 Female NPT	See Table 13
BB□□-NN-MJ□□□□-FNS8-V8	RJ Flange	1/2 Female NPT	1/2 Female NPT	

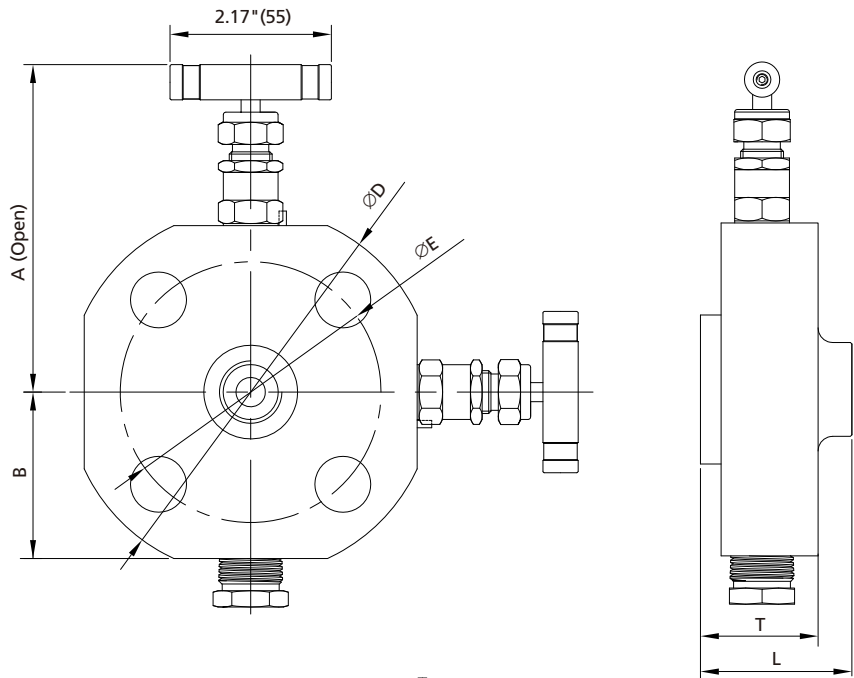

⊙ Configuration (ON): OS&Y isolate, needle vent  Connection: Flange+Thread


Basic Ordering Information	Inlet/Process Connection	Outlet/Instrument Connection	Bleed/Vent	Dimensions
BB□□-ON-MM□□□□-FNS8-V8	RF Flange	1/2 Female NPT	1/2 Female NPT	See Table 14
BB□□-ON-MJ□□□□-FNS8-V8	RJ Flange	1/2 Female NPT	1/2 Female NPT	

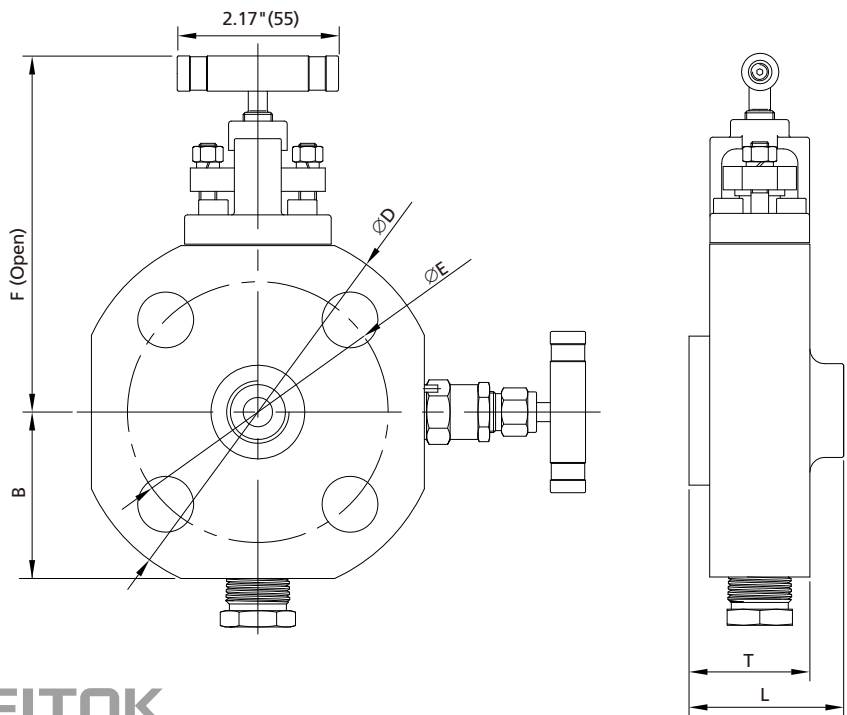

Double Block Valves (DB)


⊙ Configuration (NN): needle primary, needle secondary ——— Connection: Flange+Thread

Basic Ordering Information	Inlet/Process Connection	Outlet/Instrument Connection	Bleed/Vent	Dimensions
DB□□-NN-MM□□□□-FNS8	RF Flange	1/2 Female NPT	/	See Table 13
DB□□-NN-MJ□□□□-FNS8	RJ Flange	1/2 Female NPT	/	

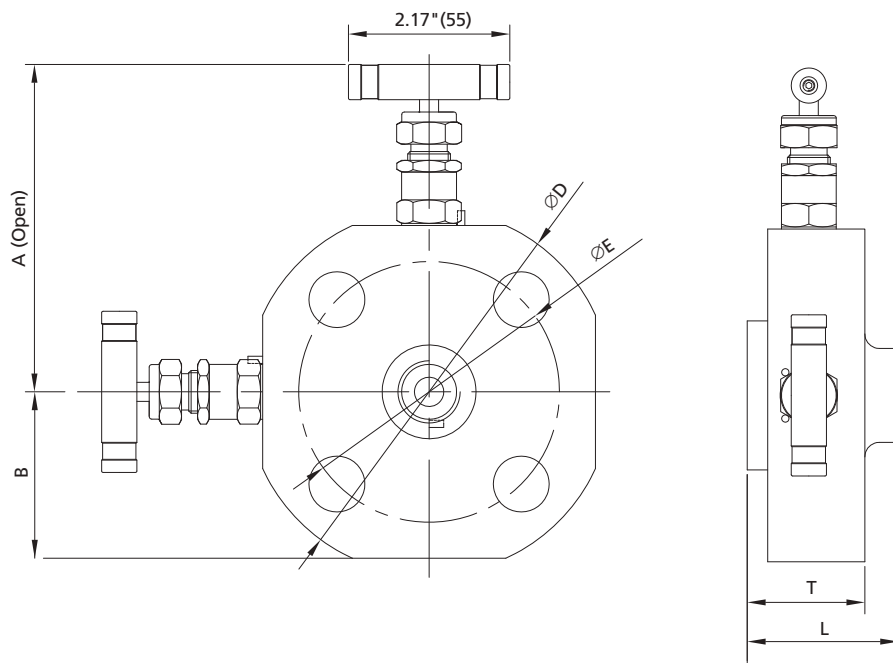

⊙ Configuration (ON): OS&Y primary, needle secondary ——— Connection: Flange+Thread

Basic Ordering Information	Inlet/Process Connection	Outlet/Instrument Connection	Bleed/Vent	Dimensions
DB□□-ON-MM□□□□-FNS8	RF Flange	1/2 Female NPT	/	See Table 14
DB□□-ON-MJ□□□□-FNS8	RJ Flange	1/2 Female NPT	/	

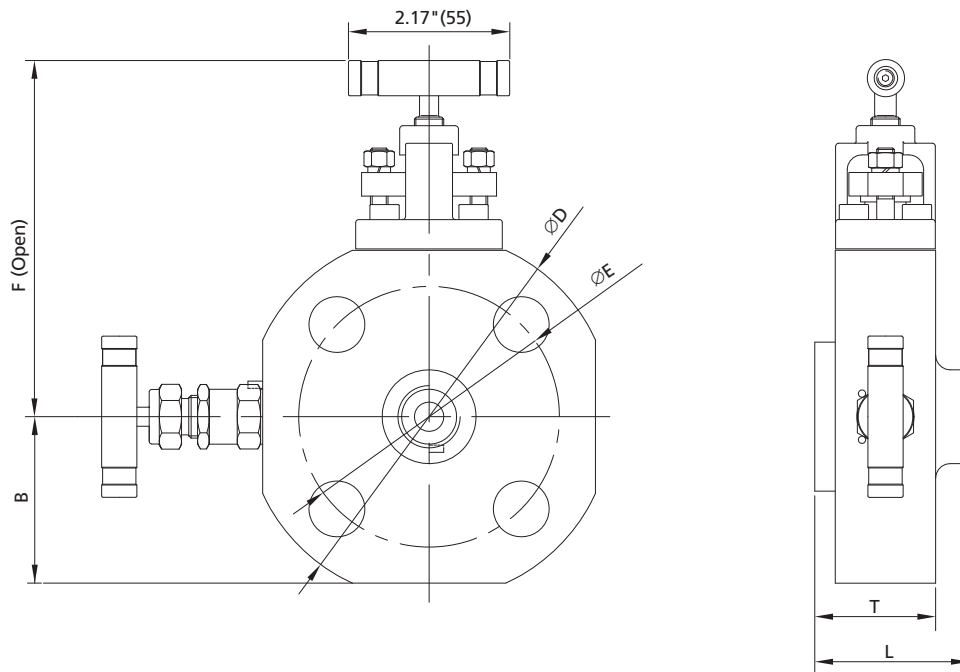


C-50 Block and Bleed Valves

Single Block Valves (SB)

⦿ Configuration (N): needle isolate, with vent port  Connection: Flange+Thread

Basic Ordering Information	Inlet/Process Connection	Outlet/Instrument Connection	Bleed/Vent	Dimensions
SB□□-N-MM□□□□-FNS8-V8	RF Flange	1/2 Female NPT	1/2 Female NPT	See Table 13
SB□□-N-MJ□□□□-FNS8-V8	RJ Flange	1/2 Female NPT	1/2 Female NPT	

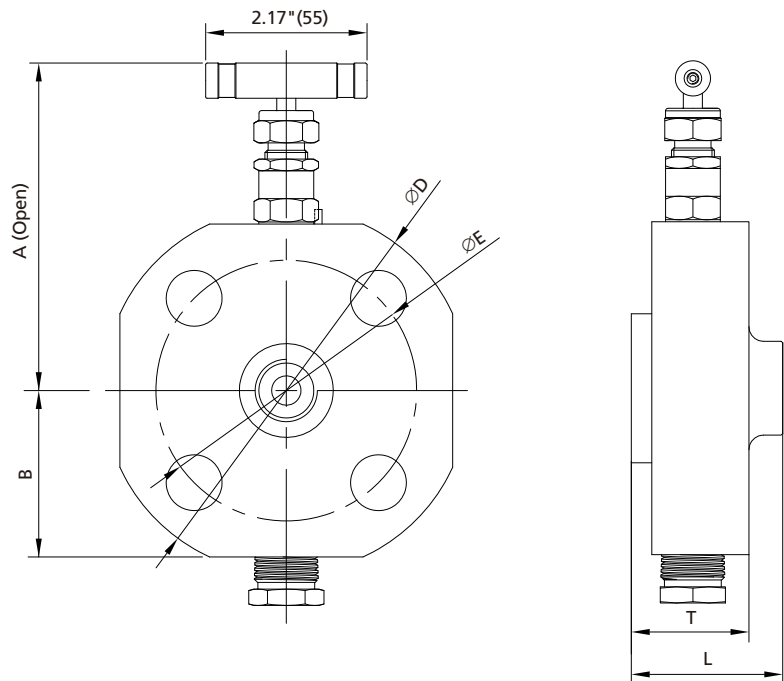

⦿ Configuration (O): OS&Y isolate, with vent port  Connection: Flange+Thread

Basic Ordering Information	Inlet/Process Connection	Outlet/Instrument Connection	Bleed/Vent	Dimensions
SB□□-O-MM□□□□-FNS8-V8	RF Flange	1/2 Female NPT	1/2 Female NPT	See Table 14
SB□□-O-MJ□□□□-FNS8-V8	RJ Flange	1/2 Female NPT	1/2 Female NPT	

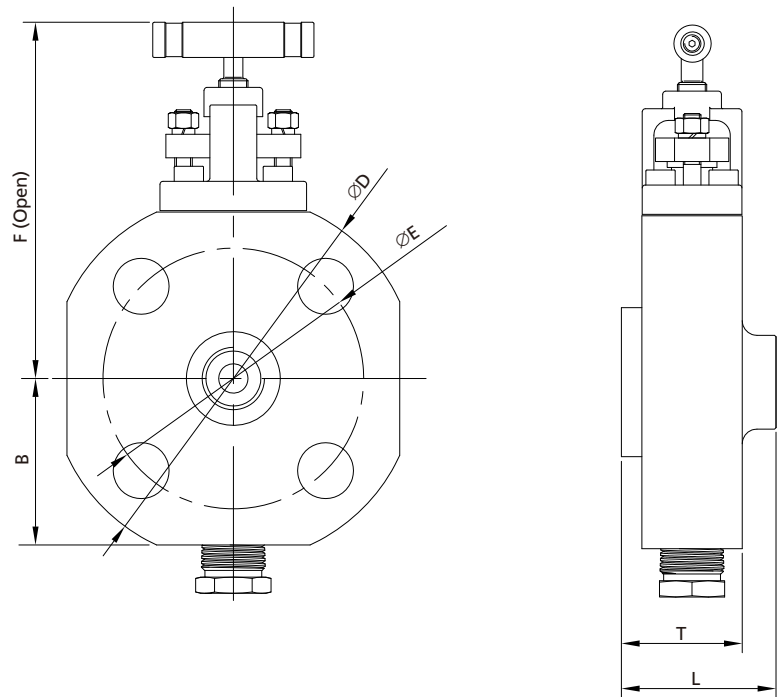


Table 13: Flange Options and Dimensions for 1/8 in. (4mm) Bore Size (Ball/Needle), configuration: N

Dimensions, in. (mm)									
Flange Size	ASME Class	A	B	RF Flange		RJ Flange		ØD	ØE
				L	T	L	T		
NPS1/2 (DN15)	150	3.94 (100.0)	1.57 (40.0)	1.73 (44.0)	1.24 (31.5)	—	—	3.54 (90)	2.37 (60.3)
	300	4.04 (102.5)	1.67 (42.5)			1.79 (45.5)	1.30 (33.0)	3.74 (95)	2.63 (66.7)
	600				1.32 (33.5)				
	900/1500	4.53 (115.0)	2.17 (55.0)	1.73 (44.0)	1.32 (33.5)	1.79 (45.5)	1.30 (33.0)	4.72 (120)	3.25 (82.6)
	2500	4.82 (122.5)	2.46 (62.5)	1.93 (48.9)	1.51 (38.4)	1.93 (48.9)	1.51 (38.4)	5.31 (135)	3.50 (88.9)
NPS3/4 (DN20)	150	4.13 (105.0)	1.77 (45.0)	1.73 (44.0)	1.24 (31.5)	—	—	3.94 (100)	2.75 (69.9)
	300	4.43 (112.5)	2.07 (52.5)			1.79 (45.5)	1.30 (33.0)	4.53 (115)	3.25 (82.6)
	600				1.32 (33.5)				
	900/1500	4.72 (120.0)	2.36 (60.0)	1.73 (44.0)	1.32 (33.5)	1.79 (45.5)	1.38 (35.0)	5.12 (130)	3.50 (88.9)
	2500	4.92 (125.0)	2.56 (65.0)	2.00 (50.9)	1.59 (40.4)	2.00 (50.9)	1.59 (40.4)	5.51 (140)	3.75 (95.2)
NPS1 (DN25)	150	4.33 (110.0)	1.97 (50.0)	1.73 (44.0)	1.24 (31.5)			4.33 (110)	3.13 (79.4)
	300	4.63 (117.5)	2.26 (57.5)			1.79 (45.5)	1.30 (33.0)	4.92 (125)	3.50 (88.9)
	600				1.32 (33.5)				
	900/1500	5.12 (130.0)	2.76 (70.0)	2.00 (50.9)	1.51 (38.4)	2.00 (50.9)	1.51 (38.4)	5.91 (150)	4.00 (101.6)
	2500	5.31 (135.0)	2.95 (75.0)	2.00 (50.9)	1.71 (43.4)	2.00 (50.9)	1.71 (43.4)	6.30 (160)	4.25 (108.0)
NPS1-1/2 (DN40)	150	4.63 (117.5)	2.26 (57.5)	1.73 (44.0)	1.24 (31.5)	1.79 (45.5)	1.30 (33.0)	4.92 (125)	3.87 (98.4)
	300	5.22 (132.5)	2.85 (72.5)	1.81 (46.0)	1.32 (33.5)	1.87 (47.5)	1.38 (35.0)	6.10 (155)	4.50 (114.3)
	600								
	900/1500	5.71 (145.0)	3.37 (85.0)	2.08 (52.9)	1.59 (40.4)	2.08 (52.9)	1.59 (40.4)	7.09 (180)	4.87 (123.8)
	2500	6.20 (157.5)	3.84 (97.5)	2.38 (60.4)	2.16 (54.9)	2.38 (60.4)	2.16 (54.9)	8.07 (205)	5.75 (146)
NPS2 (DN50)	150	5.12 (130.0)	2.76 (70.0)	1.81 (46.0)	1.24 (31.5)	1.87 (47.5)	1.30 (33.0)	5.91 (150)	4.75 (120.7)
	300	5.41 (137.5)	3.05 (77.5)	1.89 (48.0)	1.32 (33.5)	1.95 (49.5)	1.38 (35.0)	6.49 (165)	5.00 (127.0)
	600				1.44 (36.5)		1.50 (38.1)		
	900/1500	6.30 (160.0)	3.94 (100.0)	2.38 (60.4)	1.89 (47.9)	2.38 (60.4)	1.89 (47.9)	8.46 (215)	6.50 (165.1)
	2500	6.50 (165.0)	4.13 (105.0)	2.59 (65.9)	2.44 (61.9)	2.59 (65.9)	2.44 (61.9)	9.25 (235)	6.75 (171.4)

Note: For wafer-type flange block and bleed valves with 1/4 in. (6.35 mm), 3/8 in. (9.5 mm) bore, please contact FITOK Group or our authorized distributors.

Table 14: Flange Options and Dimensions for 1/8 in. (4mm) Bore Size (Needle), configuration: O

Dimensions, in. (mm)									
Flange Size	ASME Class	F	B	RF Flange		RJ Flange		ØD	ØE
				L	T	L	T		
		NPS1/2 (DN15)	150	4.33 (110.0)	1.57 (40.0)	2.03 (51.6)	1.58 (40.1)	—	—
300	4.43 (112.5)		1.67 (42.5)	2.03 (51.6)	1.58 (40.1)			3.74 (95)	2.63 (66.7)
600									
900/1500	4.92 (125.0)		2.17 (55.0)						
2500	5.22 (132.5)		2.46 (62.5)	5.31 (135)	3.50 (88.9)				
NPS3/4 (DN20)	150	4.53 (115.0)	1.77 (45.0)	2.03 (51.6)	1.58 (40.1)	—	—	3.94 (100)	2.75 (69.9)
	300	4.82 (122.5)	2.07 (52.5)			2.03 (51.6)	1.58 (40.1)	4.53 (115)	3.25 (82.6)
	600								
	900/1500	5.12 (130.0)	2.36 (60.0)						
	2500	5.31 (135.0)	2.56 (65.0)	2.11 (53.5)	1.65 (42.0)	2.11 (53.5)	1.65 (42.0)	5.51 (140)	3.75 (95.2)
NPS1 (DN25)	150	4.72 (120.0)	1.97 (50.0)	2.03 (51.6)	1.58(40.1)	2.03 (51.6)	1.58 (40.1)	4.33 (110)	3.13 (79.4)
	300	5.02 (127.5)	2.26 (57.5)					2.03 (51.6)	1.58 (40.1)
	600								
	900/1500	5.51 (140.0)	2.76 (70.0)	5.91 (150)	4.00 (101.6)				
	2500	5.71 (145.0)	2.95 (75.0)	2.11 (53.5)	1.65 (42.0)	2.11 (53.5)	1.65 (42.0)	6.30 (160)	4.25 (108.0)
NPS1-1/2 (DN40)	150	5.02 (127.5)	2.26 (57.5)	2.03 (51.6)	1.58 (40.1)	2.03 (51.6)	1.58 (40.1)	4.92 (125)	3.87 (98.4)
	300	5.61 (142.5)	2.85 (72.5)	2.11 (53.5)	1.65 (42.0)	2.11 (53.5)	1.65 (42.0)	6.10 (155)	4.50 (114.3)
	600								
	900/1500	6.10 (155.0)	3.37 (85.0)	2.19 (55.5)	1.59 (44.0)	2.19 (55.5)	1.59 (44.0)	7.09 (180)	4.87 (123.8)
	2500	6.59 (167.5)	3.84 (97.5)	2.67 (67.9)	2.22 (56.4)	2.67 (67.9)	2.22 (56.4)	8.07 (205)	5.75 (146)
NPS2 (DN50)	150	5.51 (140.0)	2.76 (70.0)	2.11 (53.5)	1.65 (42.0)	2.11 (53.5)	1.65 (42.0)	5.91 (150)	4.75 (120.7)
	300	5.81 (147.5)	3.05 (77.5)	2.19 (55.5)	1.73 (44.0)	2.19 (55.5)	1.73 (44.0)	6.49 (165)	5.00 (127.0)
	600								
	900/1500	6.69 (170.0)	3.94 (100.0)	2.42 (61.5)	1.97 (50.0)	2.42 (61.5)	1.97 (50.0)	8.46 (215)	6.50 (165.1)
	2500	6.89 (175.0)	4.13 (105.0)	2.88 (73.4)	2.44 (61.9)	2.88 (73.4)	2.44 (61.9)	9.25 (235)	6.75 (171.4)

Ordering Number Description

DBBSS - 1NNN - MM16300 - FNS8 - V8 - RGSF2


Series (Function)	Body Material	Needle Valve Bore Size	Configuration	Inlet Type	Inlet Size	Pressure Ratings	Outlet Type	Outlet Size	Vent Type and Size	Special Application	Packing/ Sealing Material	Special Function	Cleaning and Packaging
DBB Double Block and Bleed	1 4 mm 2 6.4 mm 3 9.5 mm	Configuration	Primary Isolate	Secondary Isolate	Bleed	MM RF Flange MJ RJ Flange	ASME Flange (Class Series)	Same as inlet	V4 1/4 Female NPT with plug V8 1/2 Female NPT with plug	No R Isolate/ Isolate/ Vent	PTFE G Graphite	No S NACE MR 0175	FC-01 F2 FC-02
BB Single Block and Bleed		NNN Needle	OS&Y Needle	Needle	Needle	8 1/2"	150 Class 150	FNS Female NPT					
DB Double Block		OON OS&Y	OS&Y	Needle	Needle	12 3/4"	300 Class 300	NS Male NPT					
SB Single Block		NN Needle	Needle	Needle	Needle	16 1"	600 Class 600	FRT Female BSPT					
		ON OS&Y	OS&Y	Needle	Needle	20 1 1/4"	900 Class 900	RT Male BSPT					
		O OS&Y	OS&Y	Needle	Needle	24 1 1/2"	1500 Class 1500	Same as inlet					
		N Needle	Needle	Needle	Needle	32 2"	2500 Class 2500	4 1/4"					
SS 316 SS							EN Flange (PN Series)	6 3/8"					
6L 316L SS							6 PN 6	8 1/2"					
CS Carbon Steel							10 PN 10	12 3/4"					
D7 Duplex 2507							16 PN 16						
							25 PN 25						
							40 PN 40						
							63 PN 63						
							100 PN 100						
							160 PN 160						

- For more information about hazards and risks of oxygen-enriched system, please contact FITOK Group or our authorized distributors.
- Cleaning and Packaging:
 - FC-01: Standard cleaning and packaging for general industrial procedures.
 - FC-02: Special cleaning and packaging for wetted system components to ensure compliance with product cleanliness requirement as stated in ASTM G93 Level C.
- If there is a bypass outlet in addition to the vent port (with valve), the following designators apply:
 - V4V8: V8 for 1/2 Female NPT vent, V4 for 1/4 Female NPT bypass outlet.
 - V8V4: V4 for 1/4 Female NPT vent, V8 for 1/2 Female NPT bypass outlet.
 - 2V4: 1/4 Female NPT vent and 1/4 Female NPT bypass outlet.
 - 2V8: 1/2 Female NPT vent and 1/2 Female NPT bypass outlet.

Butt-welded Type Block and Bleed Valves

Features

- ⦿ Available directly welded to the vessel or process pipe
- ⦿ Weld inlet connection sizes from NPS 1/2 to NPS 2
- ⦿ 1/2 female NPT standard vent with plug

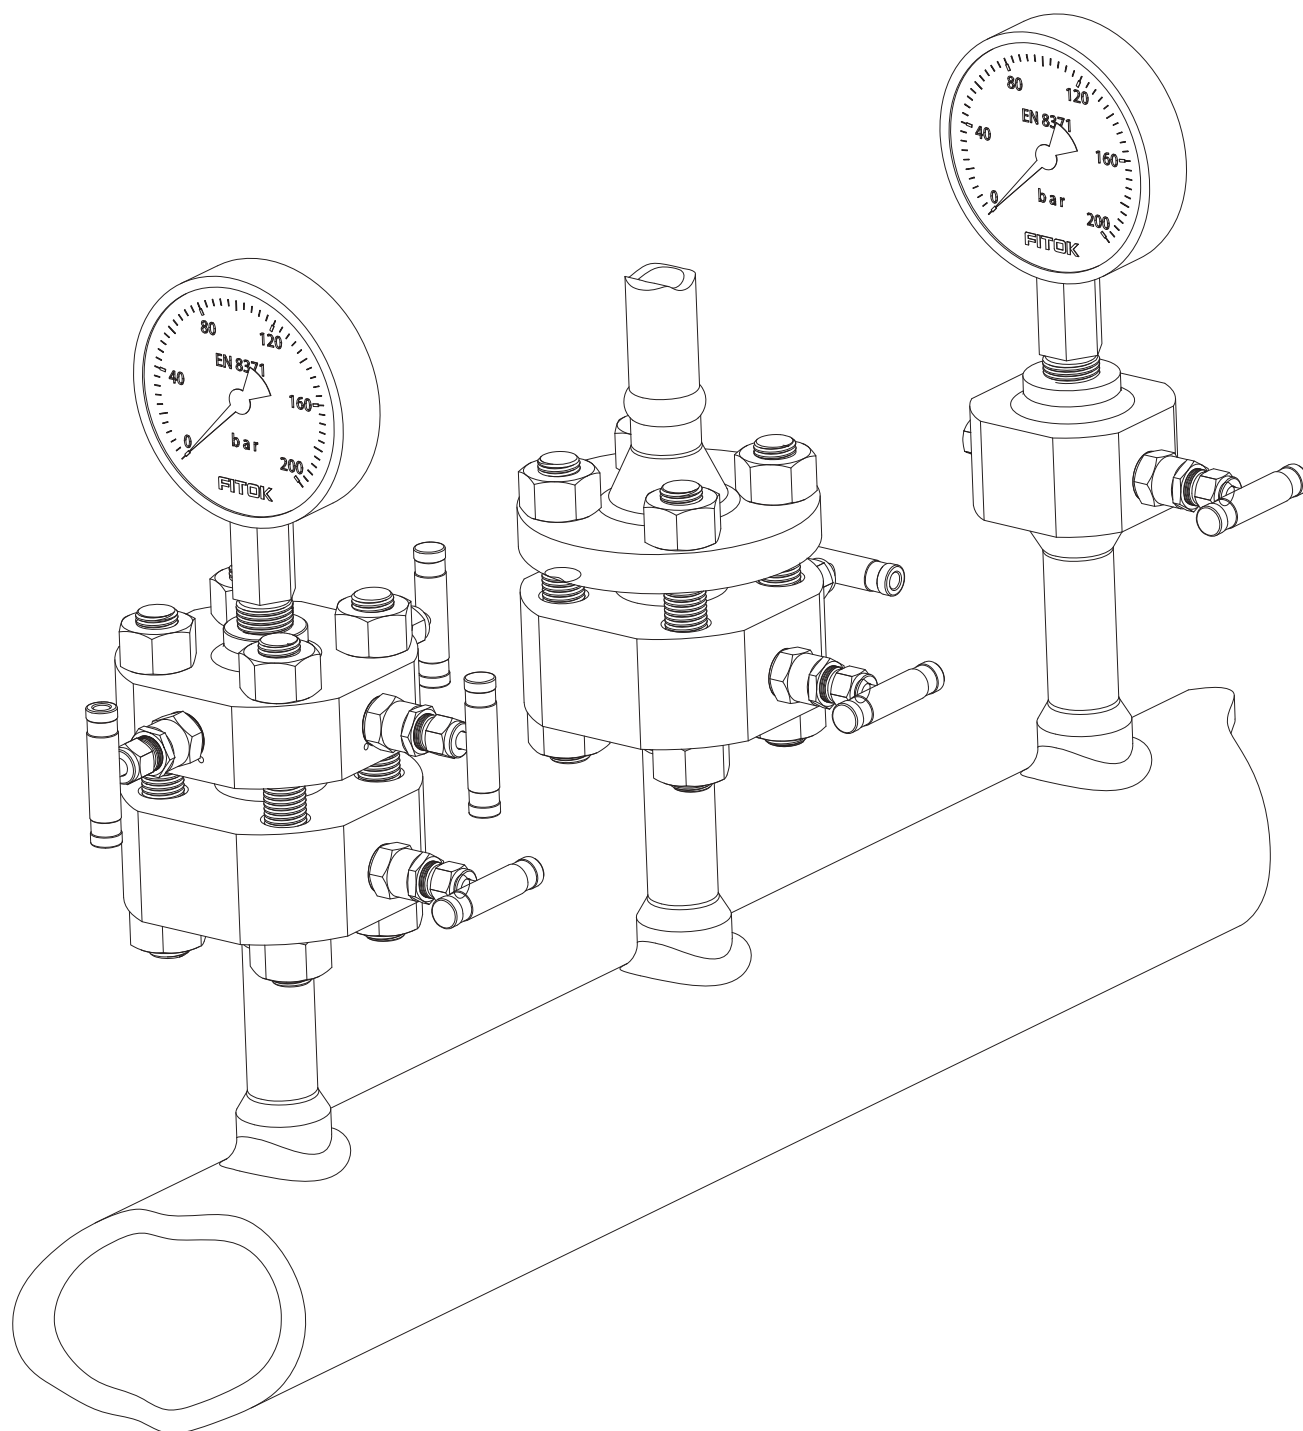


Valve Types and Dimensions

Single Block Valves (BB Series)

Configuration (NN): needle isolate, needle vent 

Connection: BWE+Flange


Basic Ordering Information	Inlet/Process Connection	Outlet/Instrument Connection	Bleed/Vent	Dimensions
BB□□-NN-BWE□-MM□□□□-V8	Butt Welding Branch	RF Flange	1/2 Female NPT	See Table 15
BB□□-NN-BWE□-MJ□□□□-V8	Butt Welding Branch	RJ Flange	1/2 Female NPT	

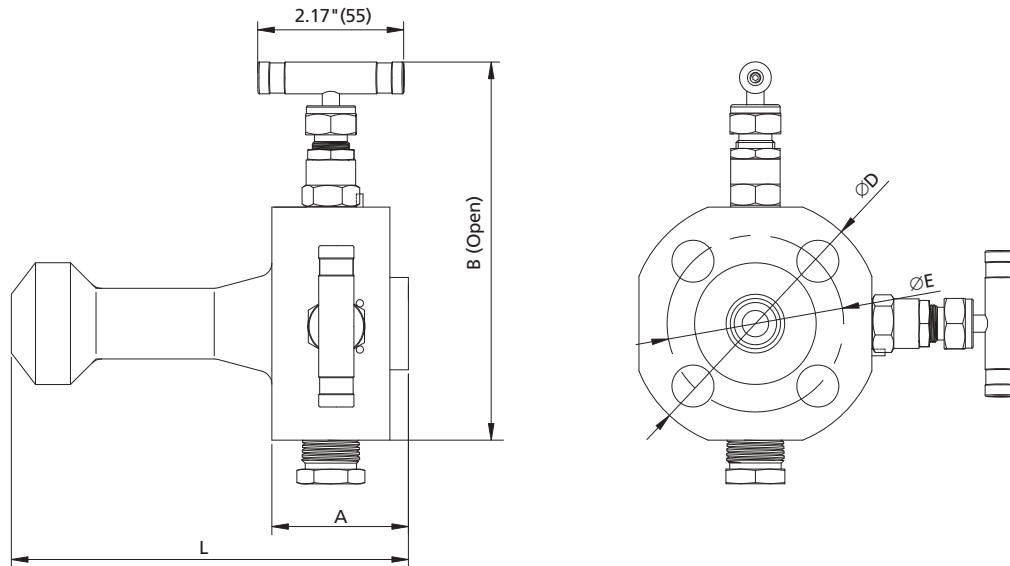

Configuration (ON): OS&Y isolate, needle vent 

Connection: BWE+Flange

Basic Ordering Information	Inlet/Process Connection	Outlet/Instrument Connection	Bleed/Vent	Dimensions
BB□□-ON-BWE□-MM□□□□-V8	Butt Welding Branch	RF Flange	1/2 Female NPT	See Table 15
BB□□-ON-BWE□-MJ□□□□-V8	Butt Welding Branch	RJ Flange	1/2 Female NPT	

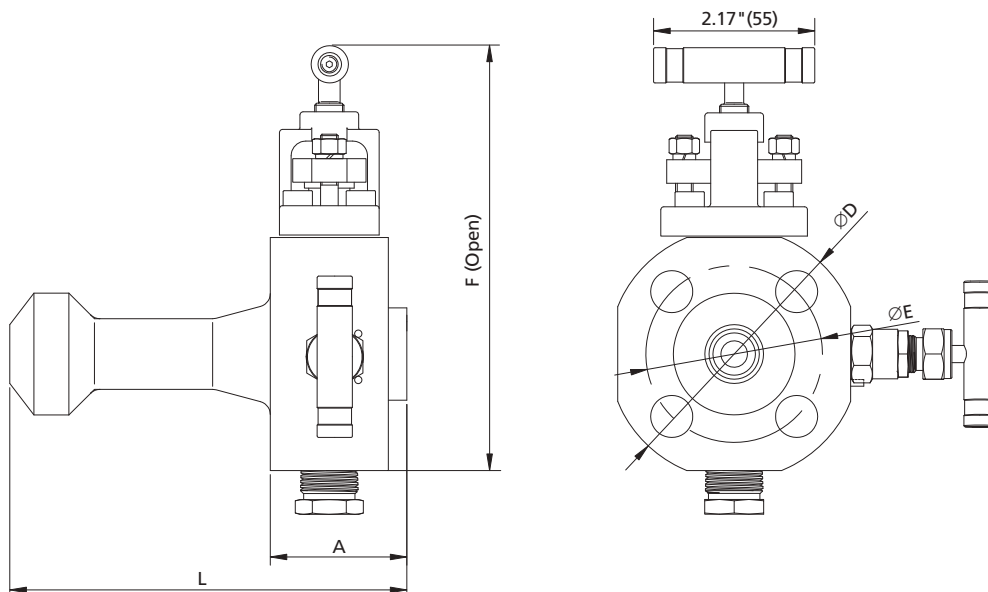


Single Block Valves (SB)

⦿ Configuration (O): OS&Y isolate, with vent port 

Connection: BWE+Flange


Basic Ordering Information	Inlet/Process Connection	Outlet/Instrument Connection	Bleed/Vent	Dimensions
SB□□-O-BWE□-MM□□□□-V8	Butt Welding Branch	RF Flange	1/2 Female NPT	See Table 15
SB□□-O-BWE□-MJ□□□□-V8	Butt Welding Branch	RJ Flange	1/2 Female NPT	

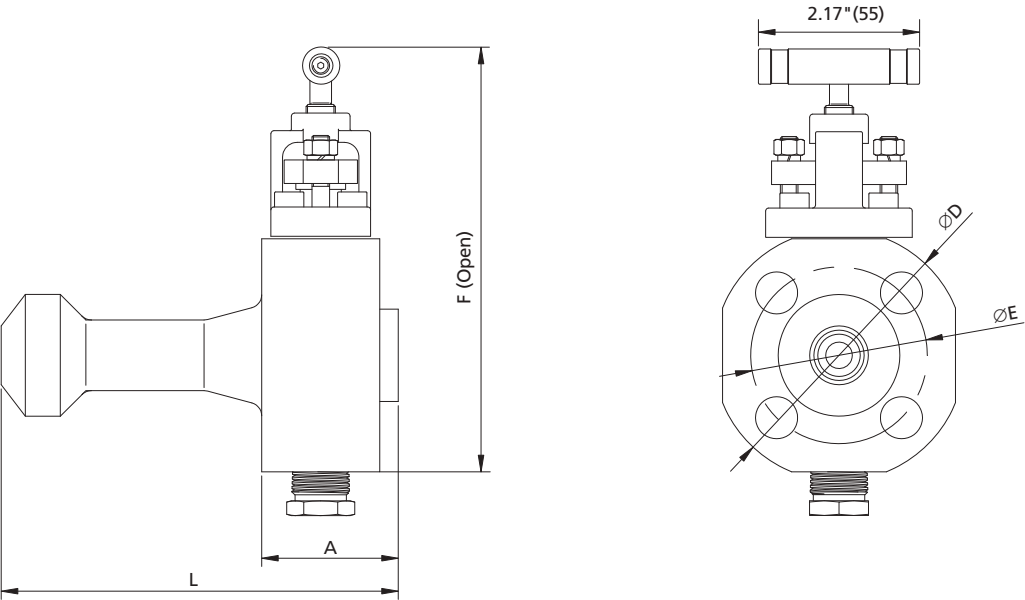

⦿ Configuration (N): needle isolate, with vent port 

Connection: BWE+Flange


Basic Ordering Information	Inlet/Process Connection	Outlet/Instrument Connection	Bleed/Vent	Dimensions
SB□□-□N-BWE□-MM□□□□-V8	Butt Welding Branch	RF Flange	1/2 Female NPT	See Tables 15-17
SB□□-□N-BWE□-MJ□□□□-V8	Butt Welding Branch	RJ Flange	1/2 Female NPT	

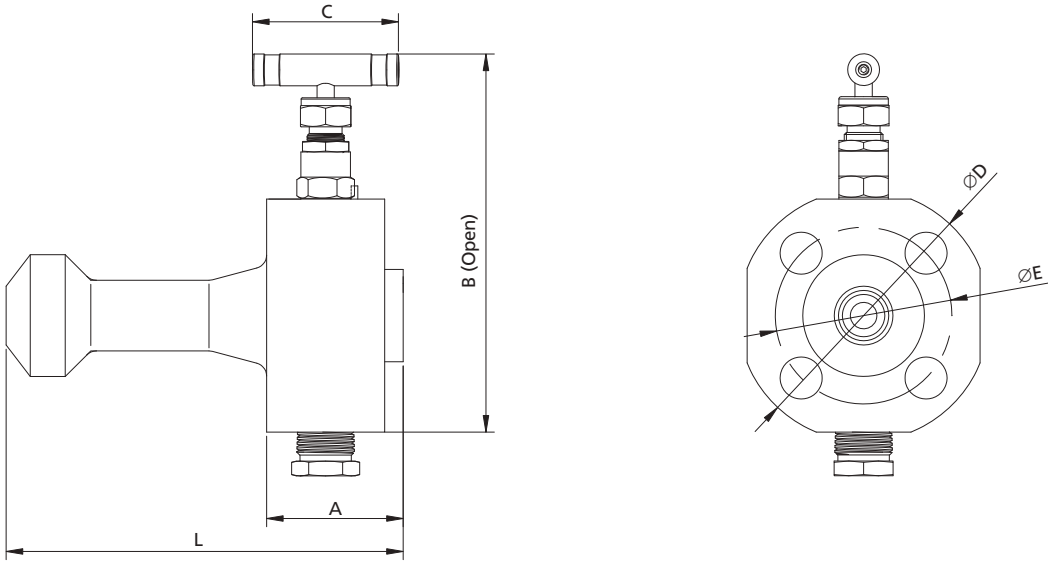


Configuration (N): needle isolate, with vent port 

Connection: BWE+Thread


Basic Ordering Information	Inlet/Process Connection	Outlet/Instrument Connection	Bleed/Vent
SB□□-N-BWE12-FNS8-V8	Butt Welding Branch	1/2 Female NPT	1/2 Female NPT

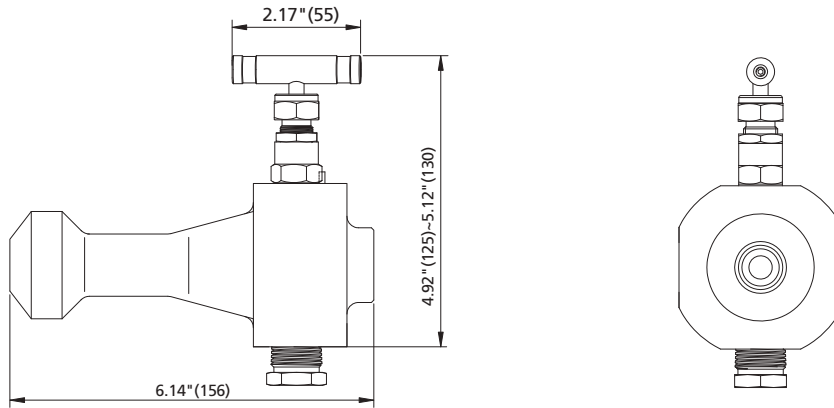

Basic Ordering Information	Inlet/Process Connection	Outlet/Instrument Connection	Bleed/Vent
SB□□-1N-BWE12-FNS8-V8	Butt Welding Branch	1/2 Female NPT	1/2 Female NPT

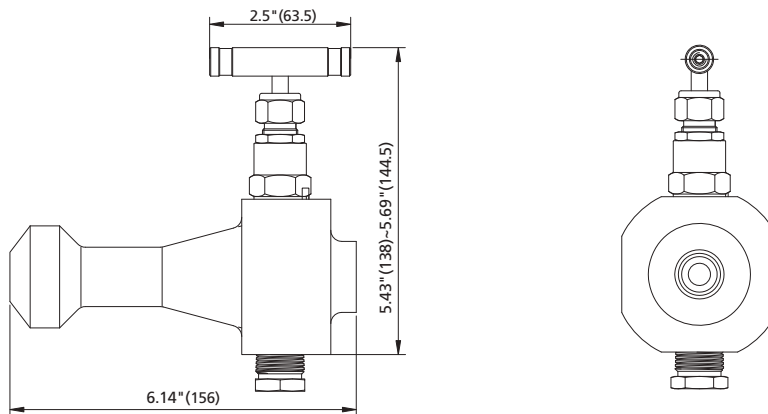

Basic Ordering Information	Inlet/Process Connection	Outlet/Instrument Connection	Bleed/Vent
SB□□-2N-BWE12-FNS8-V8	Butt Welding Branch	1/2 Female NPT	1/2 Female NPT

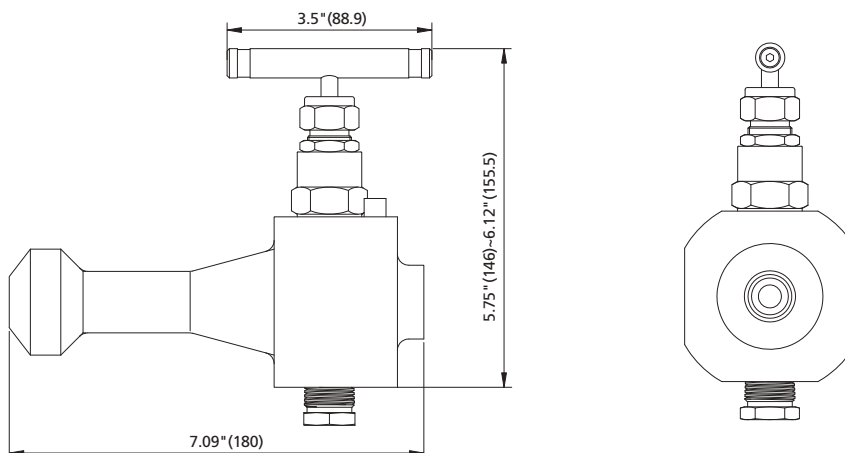

C-58 Block and Bleed Valves

Table 15: Flange Options and Dimensions for 1/8 in. (4 mm) Bore Size (Needle)

Flange Size	ASME Class	Dimensions, in. (mm)									
		A	B	F	C	L	ØD	ØE			
						RF/RJ Flange					
NPS1/2 (DN15)	150	2.0 (50.8)	5.51 (140)	5.91 (150)	2.17 (55)	6.14 (156)	3.54 (90)	2.37 (60.3)			
	300		5.71 (145)	6.10 (155)			3.74 (95)	2.63 (66.7)			
	600	2.03 (51.6)				5.91 (150)			4.72 (120)	3.25 (82.6)	
	900/1500	1.85 (47)	6.69 (170)	7.09 (180)			5.31 (135)	3.50 (88.9)			
	2500	2.07 (52.6)	7.28 (185)	7.68 (195)		3.94 (100)	2.75 (69.9)				
NPS3/4 (DN20)	150	2.0 (50.8)	5.91 (150)	6.30 (160)		2.17 (55)	6.14 (156)	4.53 (115)	3.25 (82.6)		
	300	2.03 (51.6)	6.50 (165)	6.89 (175)				5.12 (130)	3.50 (88.9)		
	600		7.09 (180)	7.48 (190)				5.51 (140)	3.75 (95.2)		
	900/1500		7.48 (190)	7.87 (200)				4.33 (110)	3.13 (79.4)		
	2500		6.30 (160)	6.69 (170)				4.92 (125)	3.50 (88.9)		
NPS1 (DN25)	150		6.89 (175)	7.28 (185)				5.91 (150)	4.00 (101.6)		
	300							7.87 (200)	8.27 (210)	6.30 (160)	4.25 (108.0)
	600									4.92 (125)	3.50 (88.9)
	900/1500									5.91 (150)	4.00 (101.6)
	2500	2.11 (53.6)	8.27 (210)	8.66 (220)				6.30 (160)	4.25 (108.0)		
NPS1-1/2 (DN40)	150	1.91 (48.6)	6.89 (175)	7.28 (185)				2.17 (55)	6.93 (176)	4.92 (125)	3.87 (98.4)
	300	2.03 (51.6)	8.07 (205)	8.46 (215)			6.10 (155)			4.50 (114.3)	
	600						7.09 (180)			4.87 (123.8)	
	900/1500	2.23 (56.5)	9.06 (230)	9.45 (240)			8.07 (205)			5.75 (146)	
	2500	2.46 (62.6)	9.84 (250)	10.24 (260)			5.91 (150)			4.75 (120.7)	
NPS2 (DN50)	150	1.95 (49.6)	7.87 (200)	8.27 (210)			2.17 (55)		7.32 (186)	6.49 (165)	5.00 (127.0)
	300	2.03 (51.6)	8.46 (215)	8.86 (225)						8.46 (215)	6.50 (165.1)
	600									2.27 (57.6)	10.24 (260)
	900/1500	2.27 (57.6)	10.24 (260)	10.63 (270)						9.25 (235)	6.75 (171.4)
	2500	2.50 (63.6)	10.63 (270)	11.02 (280)						9.25 (235)	6.75 (171.4)

Table 16: Flange Options and Dimensions for 1/4 in. (6.4 mm) Bore Size (Needle)

Dimensions, in. (mm)							
Flange Size	ASME Class	A	B	C	L	ØD	ØE
					RF/RJ Flange		
NPS1/2 (DN15)	150	2.03 (51.6)	6.08 (154.5)	2.5 (63.5)	6.14 (156)	3.54 (90)	2.37 (60.3)
	300	2.0 (50.8)	6.28 (159.5)			3.74 (95)	2.63 (66.7)
	600					4.72 (120)	3.25 (82.6)
	900/1500	2.17 (55)	7.26 (184.5)			5.31 (135)	3.50 (88.9)
	2500	2.31 (58.6)	7.85 (199.5)			3.94 (100)	2.75 (69.9)
NPS3/4 (DN20)	150	2.03 (51.6)	6.48 (164.5)		6.34 (161)	3.94 (100)	2.75 (69.9)
	300	2.23 (56.6)	7.07 (179.5)			4.53 (115)	3.25 (82.6)
	600	2.23 (56.6)				5.12 (130)	3.50 (88.9)
	900/1500	2.31 (58.6)	7.66 (194.5)			5.51 (140)	3.75 (95.2)
	2500	2.39 (60.6)	8.05 (204.5)			4.33 (110)	3.13 (79.4)
NPS1 (DN25)	150	2.03 (51.6)	6.87 (174.5)		6.54 (166)	4.33 (110)	3.13 (79.4)
	300	2.23 (56.6)	7.46 (189.5)			4.92 (125)	3.50 (88.9)
	600	2.23 (56.6)				5.91 (150)	4.00 (101.6)
	900/1500	2.43 (61.6)	8.44 (214.5)			6.30 (160)	4.25 (108.0)
	2500	2.50 (63.6)	8.84 (224.5)			4.92 (125)	3.87 (98.4)
NPS1-1/2 (DN40)	150	1.91 (48.6)	7.46 (189.5)		6.93 (176)	4.92 (125)	3.87 (98.4)
	300	2.15 (54.6)	8.64 (219.5)			6.10 (155)	4.50 (114.3)
	600	2.15 (54.6)				7.09 (180)	4.87 (123.8)
	900/1500	2.46 (62.6)	9.63 (244.5)			8.07 (205)	5.75 (146)
	2500	2.70 (68.6)	10.41 (264.5)			5.91 (150)	4.75 (120.7)
NPS2 (DN50)	150	1.95 (49.6)	8.44 (214.5)		7.32 (186)	5.91 (150)	4.75 (120.7)
	300	2.15 (54.6)	9.04 (229.5)			6.49 (165)	5.00 (127.0)
	600	2.15 (54.6)				8.46 (215)	6.50 (165.1)
	900/1500	2.66 (67.6)	10.81 (274.5)			9.25 (235)	6.75 (171.4)
	2500	2.82 (71.6)	11.20 (284.5)				

Table 17: Flange Options and Dimensions for 3/8 in. (9.5 mm) Bore Size (Needle)

Flange Size	ASME Class	Dimensions, in. (mm)							
		A	B	C	L	ØD	ØE		
					RF/RJ Flange				
NPS1/2 (DN15)	150	2.36 (60)	7.09 (161.5)	3.5 (88.9)	7.09 (180)	3.54 (90)	2.37 (60.3)		
	300		7.20 (166.5)			3.74 (95)	2.63 (66.7)		
	600								
	900/1500	2.80 (71)	8.19 (191.5)			4.72 (120)	3.25 (82.6)		
	2500	2.83 (72)	8.78 (206.5)			5.31 (135)	3.50 (88.9)		
NPS3/4 (DN20)	150	2.40 (61)	7.40 (171.5)					3.94 (100)	2.75 (69.9)
	300	2.68 (68)	7.99 (186.5)					4.53 (115)	3.25 (82.6)
	600								
	900/1500	3.03 (77)	8.58 (201.5)					5.12 (130)	3.50 (88.9)
	2500	3.19 (81)	8.98 (211.5)					5.51 (140)	3.75 (95.2)
NPS1 (DN25)	150	2.60 (66)	7.80 (181.5)			4.33 (110)	3.13 (79.4)		
	300	2.80 (71)	8.39 (196.5)			4.92 (125)	3.50 (88.9)		
	600	2.83 (72)							
	900/1500	3.23 (82)	9.37 (221.5)			5.91 (150)	4.00 (101.6)		
	2500	3.50 (89)	9.76 (231.5)			6.30 (160)	4.25 (108.0)		

Ordering Number Description

SBSS - 1NN - BWE12 - MM16300 - V8 - GSF2


Series (Function)	Body Material	Needle Valve Bore Size	Configuration	Inlet Size	Outlet Type	Outlet Size	Pressure Ratings	Vent Type and Size	Packing/ Sealing Material	Special Application	Cleaning and Packaging
SB Single Block	SS 316 SS		Configuration	8 1/2"	FNS Female NPT		ASME Flange (Class Series)	V4 1/4 Female NPT with plug	PTFE	No	FC-01
BB Single Block and Bleed	6L 316L SS		NN Needle Needle	12 3/4"	MM RF Flange		150 Class 150	V8 1/2 Female NPT with plug	G Graphite	S NACE MR 0175	F2 FC-02
	CS Carbon Steel		ON OS&Y Needle	16 1"	MJ RTJ Flange		300 Class 300				
	D7 Duplex 2507		O OS&Y —	20 1 1/4"			600 Class 600				
			N Needle —	24 1 1/2"			900 Class 900				
				32 2"			1500 Class 1500				
							2500 Class 2500				
							EN Flange (PN Series)				
							6 PN 6				
							10 PN 10				
							16 PN 16				
							25 PN 25				
							40 PN 40				
							63 PN 63				
							100 PN 100				
							160 PN 160				

- For more information about hazards and risks of oxygen-enriched system, please contact FITOK Group or our authorized distributors.
- Cleaning and Packaging:
 - FC-01: Standard cleaning and packaging for general industrial procedures.
 - FC-02: Special cleaning and packaging for wetted system components to ensure compliance with product cleanliness requirement as stated in ASTM G93 Level C.
- If there is a bypass outlet in addition to the vent port (with valve), the following designators apply:
 - V4V8: V8 for 1/2 Female NPT vent, V4 for 1/4 Female NPT bypass outlet.
 - V8V4: V4 for 1/4 Female NPT vent, V8 for 1/2 Female NPT bypass outlet.
 - 2V4: 1/4 Female NPT vent and 1/4 Female NPT bypass outlet.
 - 2V8: 1/2 Female NPT vent and 1/2 Female NPT bypass outlet.

Injection Type Block and Bleed Valves

Features


- Injection of chemicals and other media into the process stream
- A check valve is installed to prevent process fluid from reaching the inlet injection position
- The length of the injection nozzle orifice can be manufactured to meet customer requirements

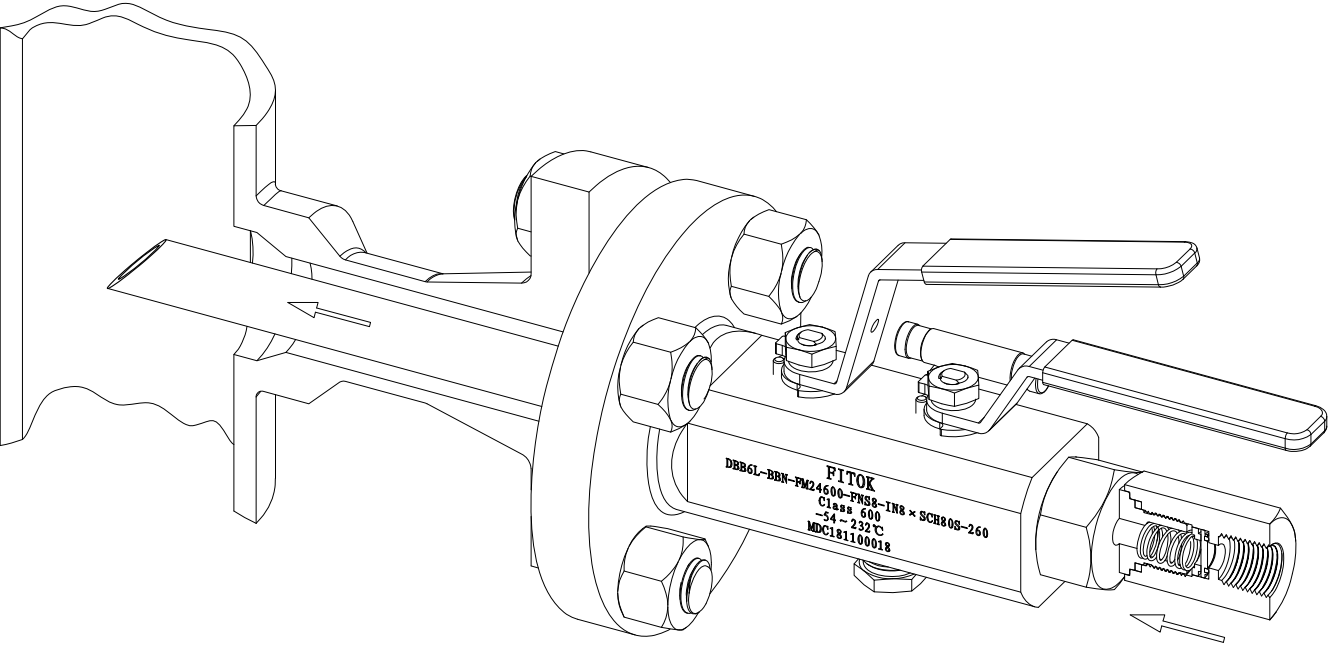


Valve Types and Dimensions

Double Block and Bleed Valves (DBB)

- Configuration (BBN): ball isolate, ball isolate, needle vent, check valve at inlet, injection nozzle at outlet
Connection: Flange+Thread



Basic Ordering Information	Inlet/Process Connection	Outlet/Instrument Connection	Bleed/Vent	Dimensions
DBB□□-BBN-FNS□-FM□□□□-V□-IN□□-□	Female NPT	RF Flange	Female NPT	See Tables 1-3
DBB□□-BBN-FNS□-FJ□□□□-V□-IN□□-□	Female NPT	RJ Flange	Female NPT	

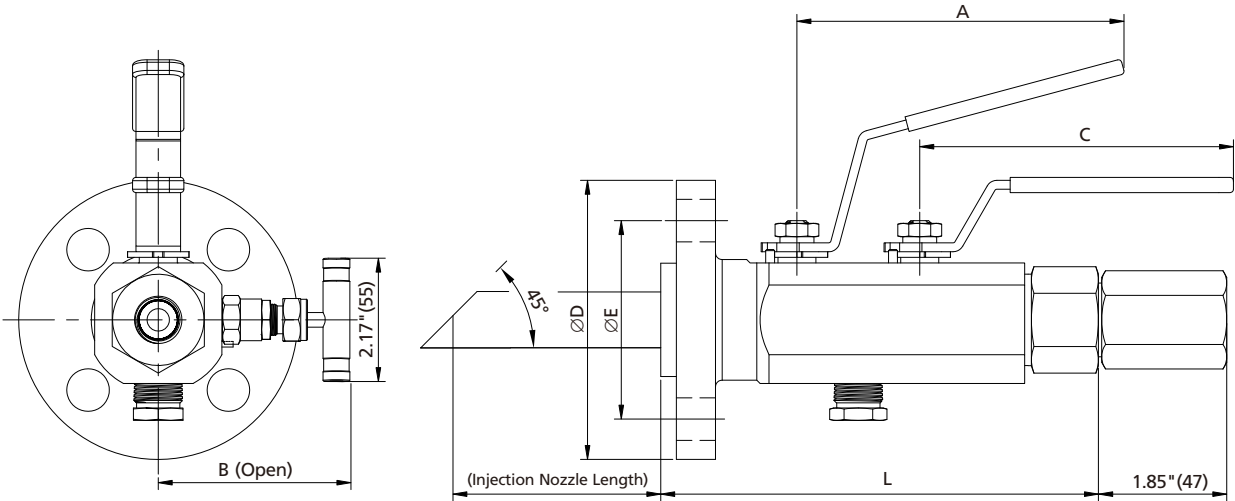

Ordering Number Description

DBBSS - BBN - FNS8 - FM16300 - V8 - INGS12x2 - 298


Series (Function)		Body Material	Configuration				Inlet Type	Inlet Size	Outlet Type	Outlet Size	Pressure Ratings	Vent Type and Size	Packing/ Sealing Material	Special Application	Injection Nozzle Type	Injection Nozzle Size	Injection Nozzle W.T.	Injection Nozzle Length
DBB	Double Block and Bleed Valves		Config-uration	Primary Isolate	Secondary Isolate	Bleed	FNS Female NPT		FM RF Flange		ASME Flange (Class Series)	V4 1/4 Female NPT with Plug	P PTFE		Pipe Tube		SCH80 Pipe	
			BBN Ball	Ball	Ball	Needle	NS Male NPT		FJ RJ Flange		150 Class 150	V8 1/2 Female NPT with Plug	G Graphite		M Metric Tube		1.5 mm Metric Tube	
			NNN Needle	Needle	Needle	Needle	FRT Female BSPT				300 Class 300				F Fractional Tube		0.065 in. Fractional Tube	
SS	316 SS						RT Male BSPT		8	1/2"	600 Class 600		No				Wall thicknesses of metric and fractional tube refer to FITOK Tubing catalog and pipe wall thickness refer to ASME B36.10M	
6L	316L SS						ML Metric Tube Fitting		12	3/4"	900 Class 900		S NACE MR 0175		4 1/4"			
D7	Duplex 2507						FL Fractional Tube Fitting		16	1"	1500 Class 1500				6 3/8" or 6 mm			
							FMS Female Metric Thread		20	1 1/4"	2500 Class 2500				8 1/2" or 8 mm			
							MS Male Metric Thread		24	1 1/2"	EN Flange (PN Series)				10 10 mm			
									32	2"	6 PN 6				12 3/4" or 12 mm			
											10 PN 10				14 14 mm			
											16 PN 16				16 1" or 16 mm			
											25 PN 25				20 20 mm			
											40 PN 40							
											63 PN 63							
											100 PN 100							
											160 PN 160							
																	298 Specified by customer (unit: mm)	

Note: For more information about hazards and risks of oxygen-enriched system, please contact FITOK Group or our authorized distributors.

Sampling Type Block and Bleed Valves


Features

- Developed to remove a sample directly from process stream at full system pressure
- Customized sampling probe extends from the pipe flange connection for correct sample removal
- Sampling probe length is manufactured to meet customer requirements

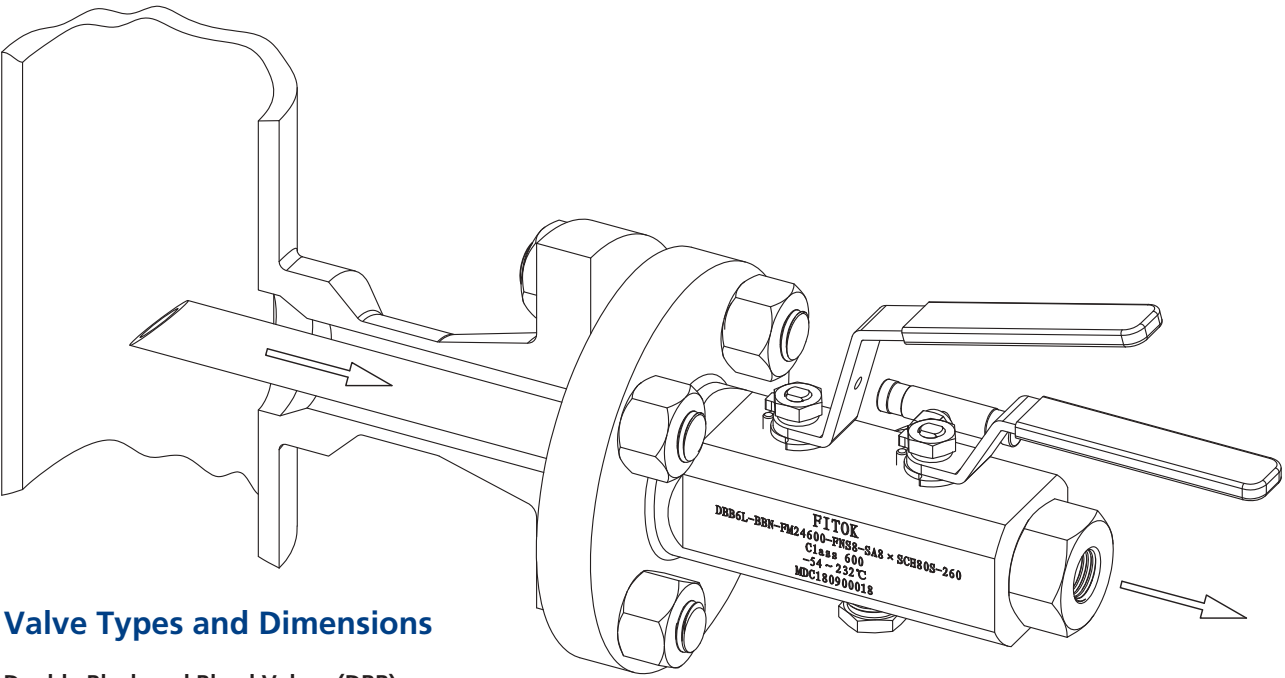


Valve Types and Dimensions

Double Block and Bleed Valves (DBB)

- Configuration (BBN): ball isolate, ball isolate, needle vent, sampling probe at inlet  Connection: Thread+Flange

Basic Ordering Information	Inlet/Process Connection	Outlet/Instrument Connection	Bleed/Vent	Dimensions
DBB□□-BBN-FM□□□□-FNS□-V□-SA□-□	RF Flange	Female NPT	Female NPT	See Tables 1-3
DBB□□-BBN-FJ□□□□-FNS□-V□-SA□-□	RJ Flange	Female NPT	Female NPT	

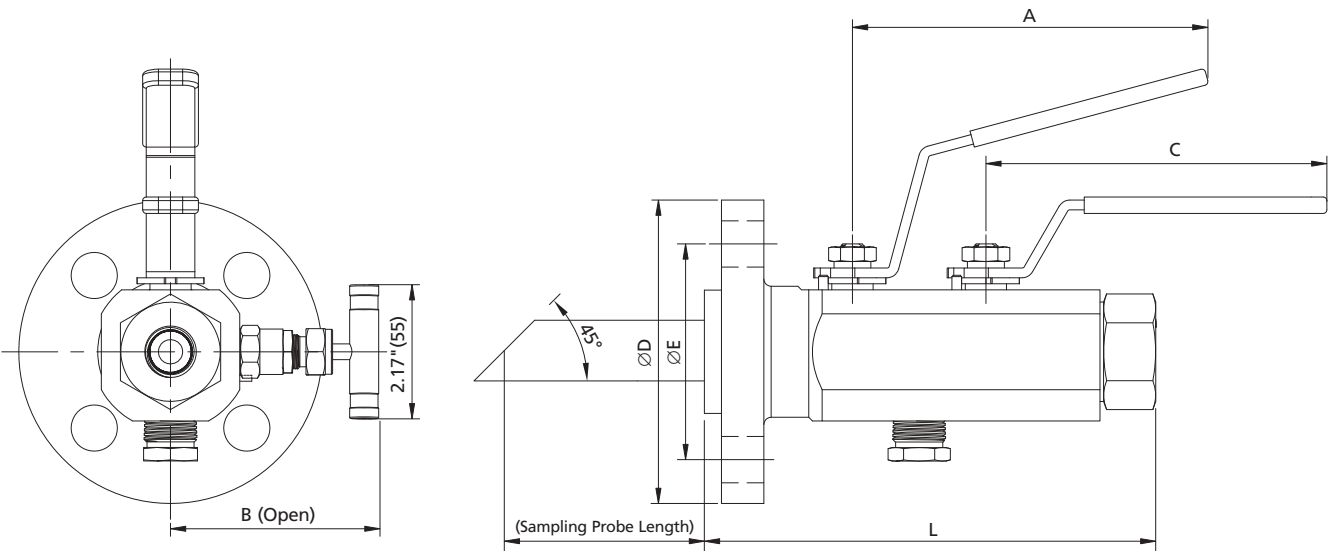

Ordering Number Description

DBBSS - BBN - FM16300 - FNS8 - V8 - SAGSF12x2 - 298


[illegible]

Note: For more information about hazards and risks of oxygen-enriched system, please contact FITOK Group or our authorized distributors.

Instrument Block and Bleed Valves

Features

- ⦿ Integrally forged body
- ⦿ A variety of instrument connections available
- ⦿ 1/4 female NPT standard vent with plug

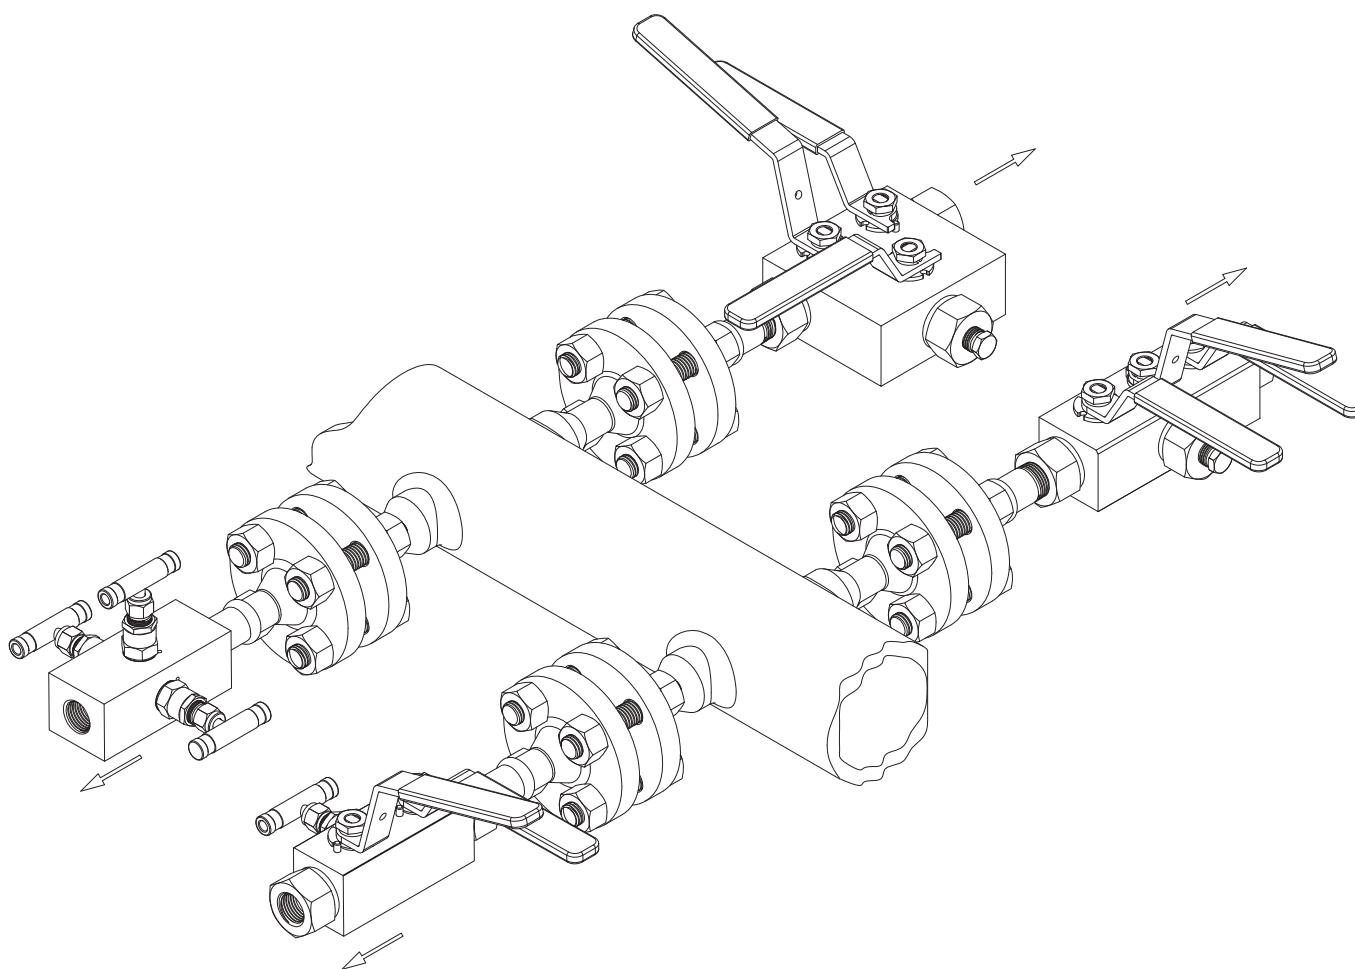


Valve Types and Dimensions

Double Block and Bleed Valves (BBN)


Configuration (BBN): ball isolate, ball isolate, needle vent  Connection: Thread+Thread

Basic Ordering Information	Inlet/Process Connection	Outlet/Instrument Connection	Bleed/Vent
DBB□□-□BBN□-FNS□-V4-V	Female NPT	Female NPT	1/4 Female NPT

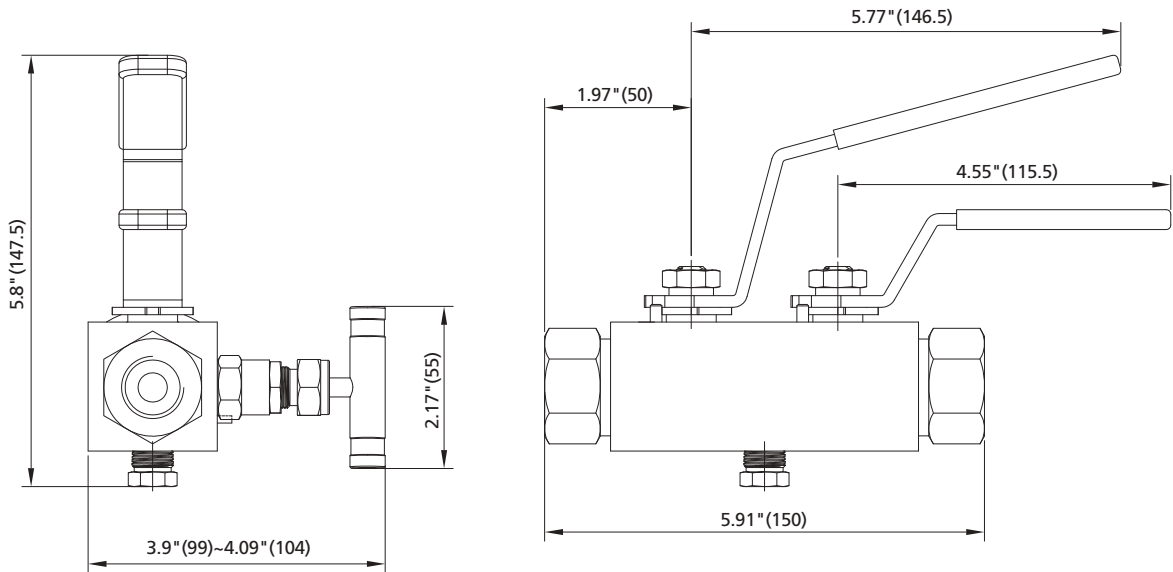

Configuration (BBB): ball isolate, ball isolate, ball vent  Connection: Thread+Thread

Basic Ordering Information	Inlet/Process Connection	Outlet/Instrument Connection	Bleed/Vent
DBB□□-BBB□-FNS□-V4-C	Female NPT	Female NPT	1/4 Female NPT

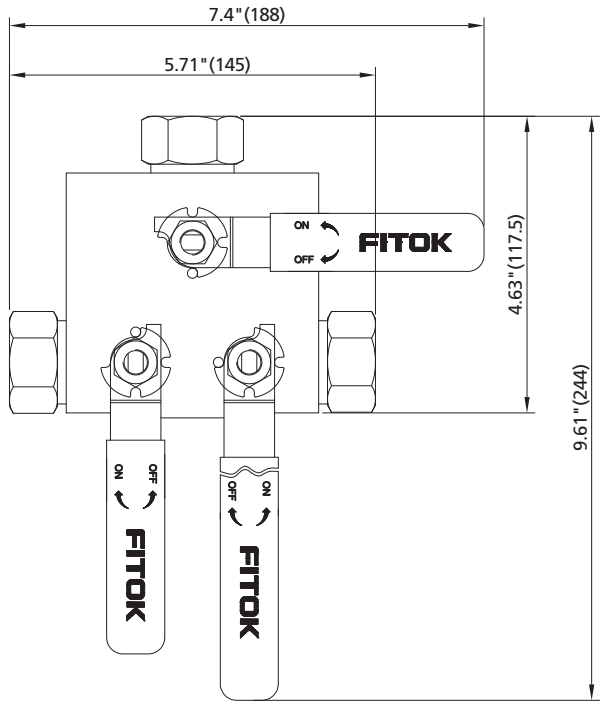


Manifolds

C-68 Block and Bleed Valves


Configuration (BBB): ball isolate, ball isolate, ball vent  Connection: Thread+Thread

Basic Ordering Information	Inlet/Process Connection	Outlet/Instrument Connection	Bleed/Vent
DBB□□-BBB□-FNS□-V4-L	Female NPT	Female NPT	1/4 Female NPT

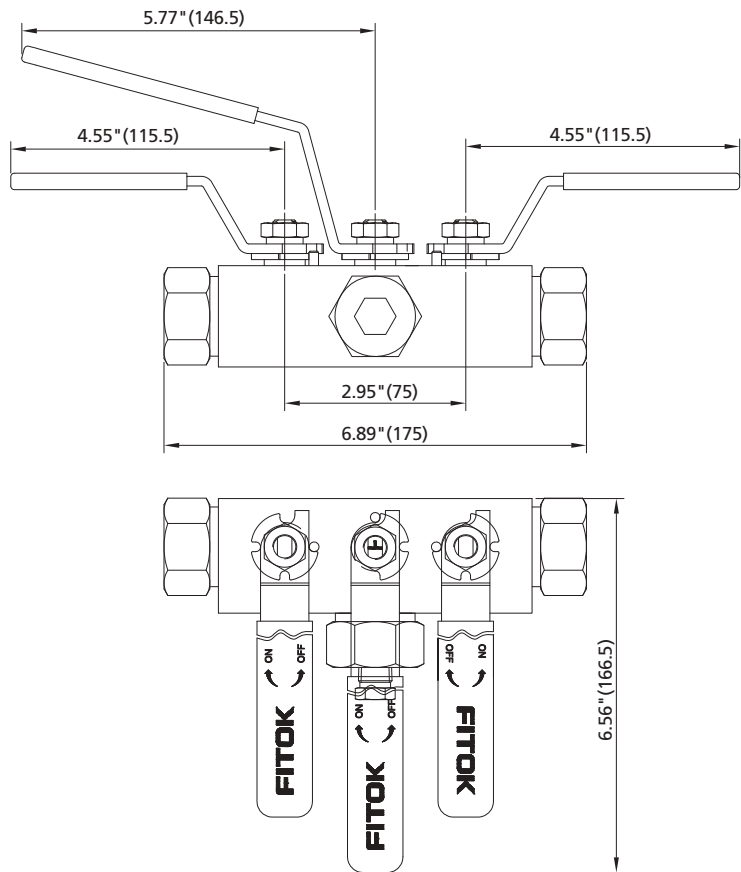

Configuration (NNN): needle isolate, needle isolate, needle vent  Connection: Thread+Thread

Basic Ordering Information	Inlet/Process Connection	Outlet/Instrument Connection	Bleed/Vent
DBB□□-□NNN-FNS□-V4-V	Female NPT	Female NPT	1/4 Female NPT

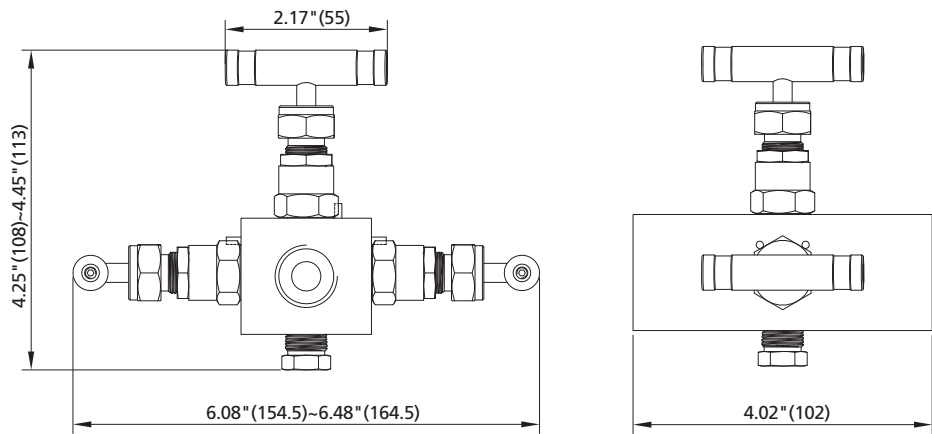


Single Block and Bleed Valves (BB)

Configuration (BN): ball isolate, needle vent

Connection: Thread+Thread


Basic Ordering Information	Inlet/Process Connection	Outlet/Instrument Connection	Bleed/Vent
BB□□-□BN□-FNS□-V4-V	Female NPT	Female NPT	1/4 Female NPT

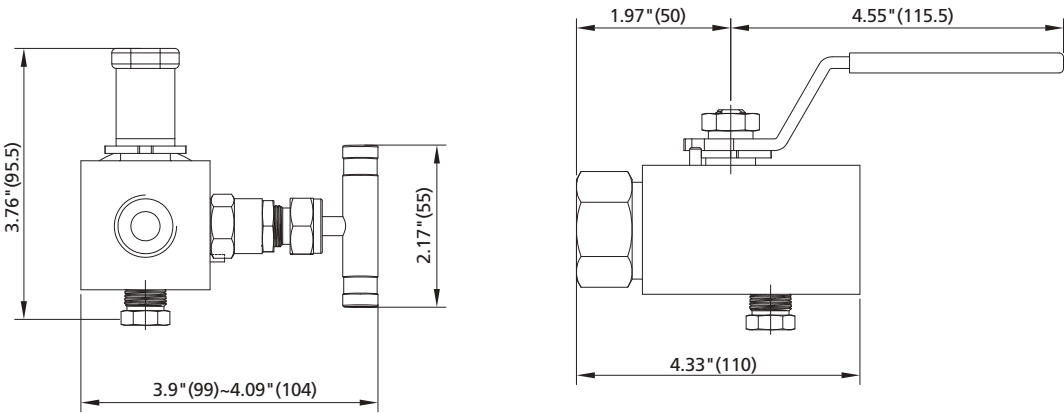

Configuration (BB): ball isolate, ball vent

Connection: Thread+Thread


Basic Ordering Information	Inlet/Process Connection	Outlet/Instrument Connection	Bleed/Vent
BB□□-□BB□-FNS□-V4-C	Female NPT	Female NPT	1/4 Female NPT

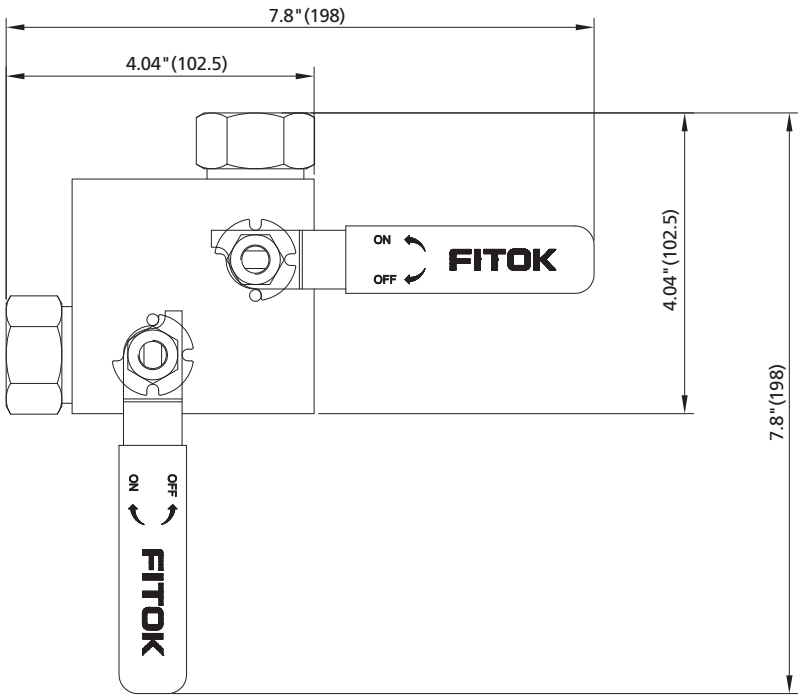

Manifolds

Ordering Number Description

DBBSS - 1BBN1 - NS810K - FNS810K - V4 - CGSF2

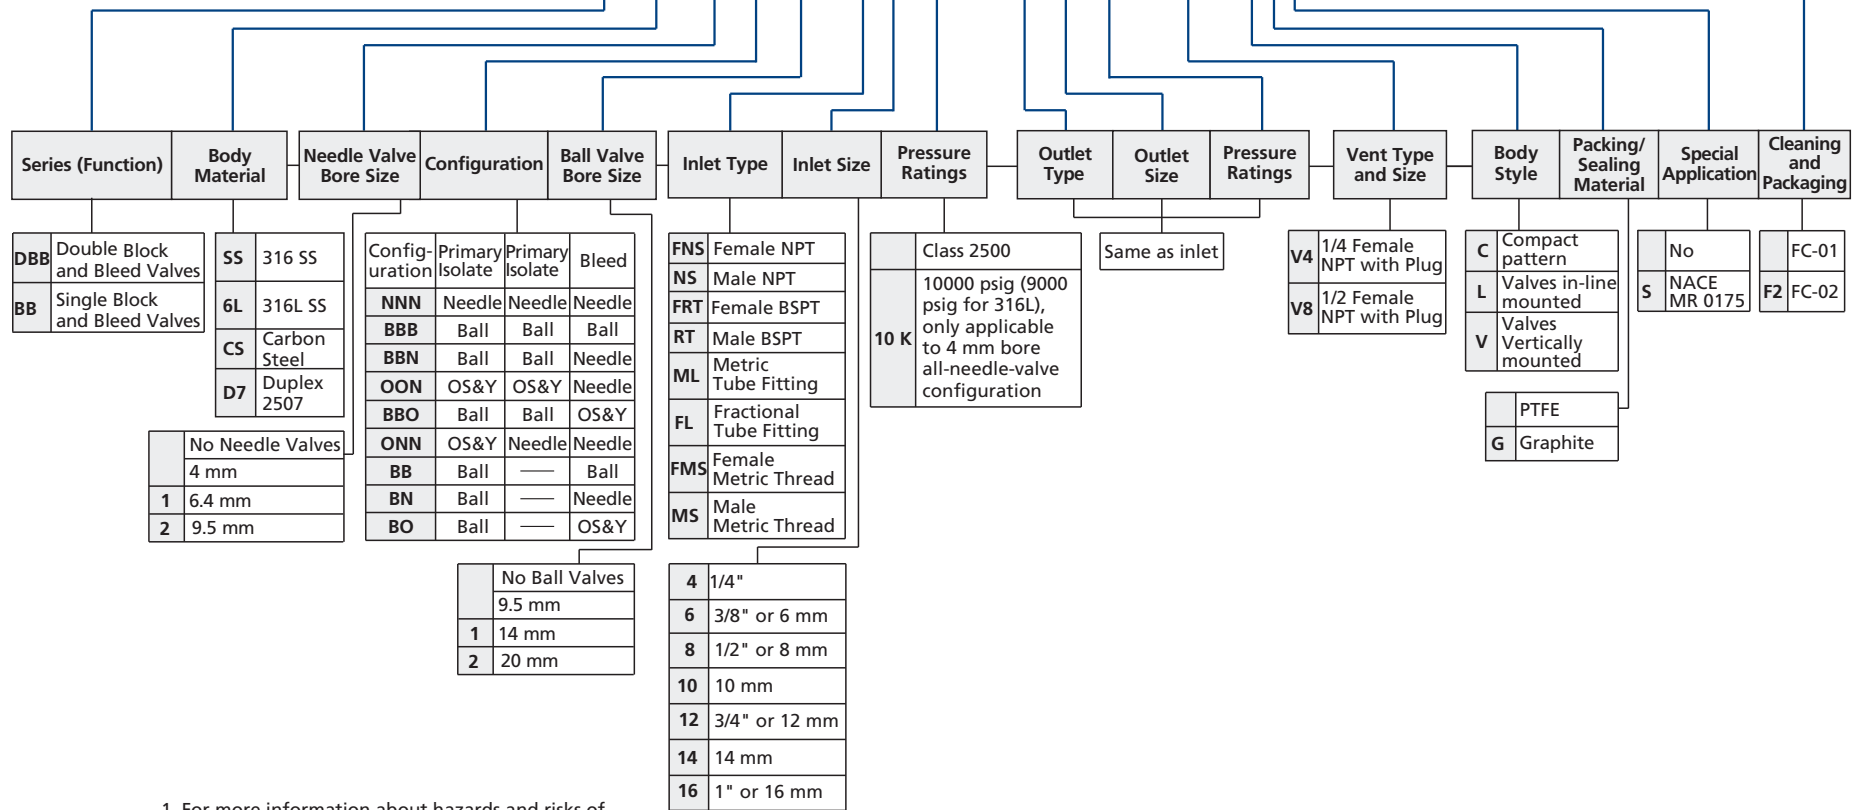

- For more information about hazards and risks of oxygen-enriched system, please contact FITOK Group or our authorized distributors.
- Cleaning and Packaging:
 - FC-01: Standard cleaning and packaging for general industrial procedures.
 - FC-02: Special cleaning and packaging for wetted system components to ensure compliance with product cleanliness requirement as stated in ASTM G93 Level C.

info@fitokgroup.com
www.fitokgroup.com

FK-IC-GV-13-EN-250217