

One-Piece Instrumentation Ball Valves

BO Series

Features



- ⦿ Working pressures up to 3,000 psig (207 bar)
- ⦿ Working temperature: -65°F to 300°F (-54°C to 148°C)
- ⦿ Cv up to 12
- ⦿ No dead space for enhanced cleanliness
- ⦿ One-piece body and one-piece ball stem for improved sealing performance
- ⦿ Top-loaded design allows adjustment with the valve in-line
- ⦿ Live-loaded design improves thermal cycling performance and compensates for packing wear
- ⦿ Available in 2-way, 3-way, 4-way, 5-way, 6-way or 7-way flow patterns
- ⦿ Angle-pattern flow path available
- ⦿ Each valve is factory leak-tested with nitrogen or compressed air at rated pressure



Notes:

1. To prevent seat leakage, packing adjustment may be required periodically during the service life of the valve.
2. A higher initial actuation torque may happen to the valves that have not been actuated for a period of time.
3. Before installation, instrumentation ball valves exposed to dynamic temperature conditions may lose their initial packing load. Stem packing adjustment should be required.

Standard Materials of Construction

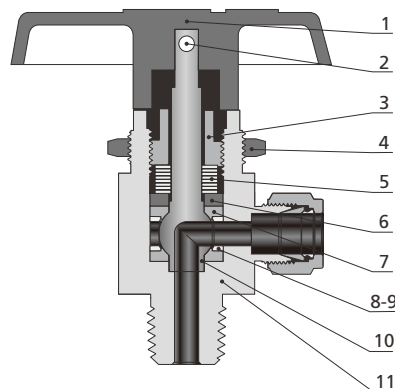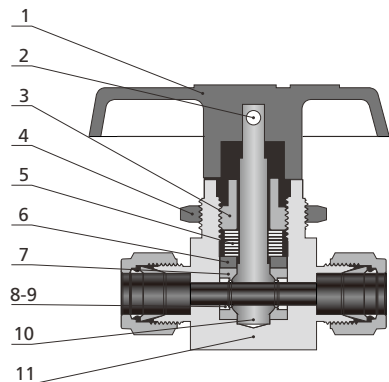

Item	Component	Valve Body Material		
		316 SS	Brass	Alloy 400
		Material Grade/ASTM Specification		
1	Handle	Nylon or Aluminium		
2	Set Screw	Zinc-plated carbon steel		
3	Packing Bolt	316 SS/A479	Brass C36000/B16	316 SS/A479
4	Panel Nut	316 SS/A479	Brass C36000/B16	316 SS/A479
5	Disc Spring	S17700/A693		
6	Gland	316 SS/A479	316 SS/A479	316 SS/A479
7	<i>Packing Seat</i>	<i>PTFE/D1710 or UHMWPE/D4020 or PFA/D3307</i>		
8	<i>Support Ring</i>	316 SS/A479	316 SS/A479	Alloy 400/B164
9	<i>Support Disc</i>			
10	<i>Ball Stem</i>	316 SS/A479	Brass C36000/B16	Alloy 400/B164
11	<i>Body</i>	316 SS/A182	Brass C37700/B283	Alloy 400/B164
<i>Wetted Lubricant</i>		<i>Fluorinated-based and silicone-based</i>		
Non-wetted Lubricant		Molybdenum disulfide with hydrocarbon binder coat		

Note: Wetted components are listed in italics.

For other materials, please contact FITOK Group or our authorized distributors.

On-Off (2-way) Valves

Standard Flow Path

Straight Pattern




Angle Pattern



Pressure vs. Temperature

Straight Pattern and Angle Pattern

PTFE Packing Seat

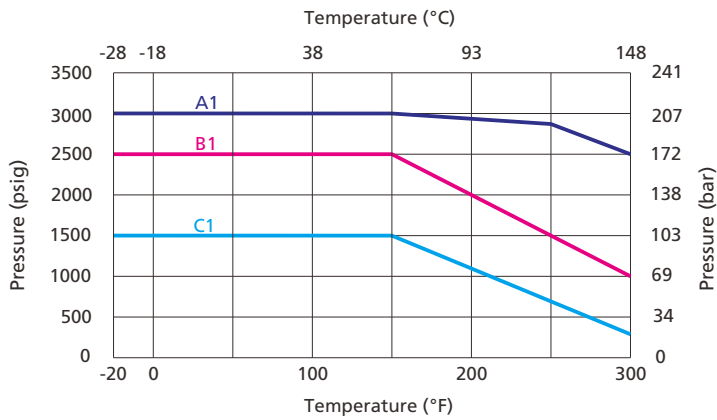

A1: Straight Pattern Valves (orifice 0.19")


B1: Straight Pattern Valves (orifice 0.05" & 0.06" & 0.09" & 0.13" & 0.28" & 0.41")

Angle Pattern Valves (orifice 0.05" & 0.06" & 0.09" & 0.13" & 0.19")

C1: Angle Pattern Valves (orifice 0.28" & 0.41")

PFA, UHMWPE Packing Seat

The working temperature of UHMWPE packing seat should not be higher than 150°F (65°C).

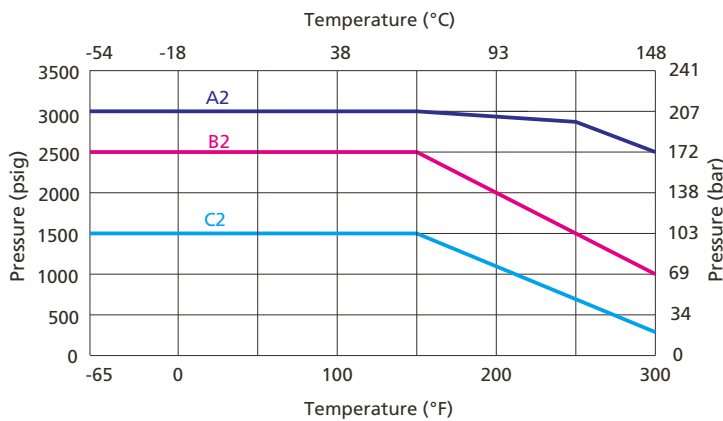

A2: Straight Pattern Valves (orifice 0.19")


B2: Straight Pattern Valves (orifice 0.05" & 0.06" & 0.09" & 0.13" & 0.28" & 0.41")

Angle Pattern Valves (orifice 0.05" & 0.06" & 0.09" & 0.13" & 0.19")


C2: Angle Valves (orifice 0.28" & 0.41")

Dimensions

Straight Pattern

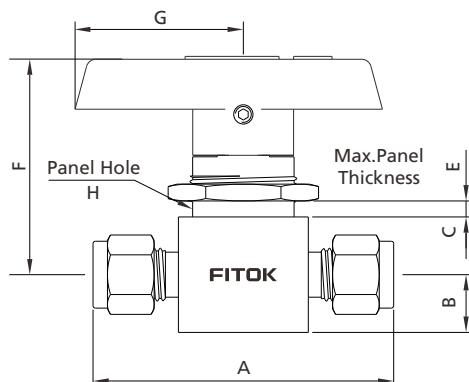

Angle Pattern

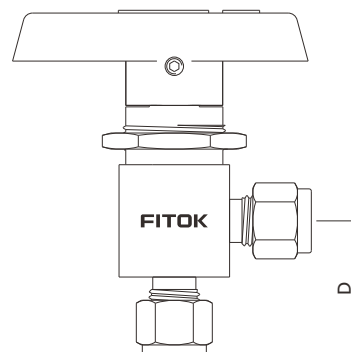

B-28 Ball Valves

Basic Ordering Number	Connection Type and Size	Orifice in. (mm)	Cv		Dimensions, in. (mm)							
			Straight	Angle	A	B	C	D	E ^①	F	G	H
BO□□-FL1-00	1/16" FITOK	0.05 (1.3)	0.10	—	1.68 (42.7)	0.28 (7.1)	0.34 (8.6)	—	0.25 (6.4)	1.43 (36.2)	1.10 (28)	19/32 (15.1)
BO□□-FL2-02	1/8" FITOK	0.09 (2.4)	0.20	0.15	2.01 (51.1)			0.97 (24.6)				
BO□□-FL4-03	1/4" FITOK	0.13 (3.2)	0.60	0.35	2.21 (56.1)			1.07 (27.2)				
BO□□-FL4-05		3/8" FITOK	0.19 (4.8)	1.40	0.90	2.39 (60.7)	0.38 (9.7)	0.44 (11.2)	1.17 (29.7)	0.19 (4.8)	1.64 (41.7)	1.57 (39.9)
BO□□-FL6-05	1.50			2.58 (65.5)		1.29 (32.8)						
BO□□-FL6-07			0.28 (7.1)	6.00	2.00	3.05 (77.5)	0.56 (14.2)	0.56 (14.2)	1.43 (36.3)	0.35 (9)	2.19 (55.5)	2.05 (52)
BO□□-FL8-10	1/2" FITOK	0.41 (10.3)	12.00	4.60	3.92 (99.6)	0.69 (17.5)	0.69 (17.5)	1.74 (44.2)	0.49 (12.5)	2.67 (67.7)	3.13 (79.6)	1 1/2 (38.1)
BO□□-FL12-10	3/4" FITOK		6.40	3.80								
BO□□-ML3-02	3 mm FITOK	0.09 (2.4)	0.20	0.15	2.01 (51.1)	0.28 (7.1)	0.34 (8.6)	0.97 (24.6)	0.25 (6.4)	1.43 (36.2)	1.10 (28)	19/32 (15.1)
BO□□-ML6-03	6 mm FITOK	0.13 (3.2)	0.60	0.35	2.21 (56.1)			1.07 (27.2)				
BO□□-ML6-05		0.19 (4.8)	1.40	0.90	2.39 (60.7)			0.38 (9.7)				
BO□□-ML8-05	8 mm FITOK		1.50		2.46 (62.5)	1.20 (30.5)						
BO□□-ML10-07	10 mm FITOK	0.28 (7.1)	6.00	2.00	3.07 (78.0)	0.56 (14.2)	0.56 (14.2)	1.43 (36.3)	0.35 (9)	2.19 (55.5)	2.05 (52)	1 1/8 (28.6)
BO□□-ML12-10	12 mm FITOK	0.41 (10.3)	12.00	4.60	3.92 (99.6)	0.69 (17.5)	0.69 (17.5)	1.74 (44.2)	0.49 (12.5)	2.67 (67.7)	3.13 (79.6)	1 1/2 (38.1)
BO□□-FNS2-03	1/8 Female NPT	0.13 (3.2)	0.50	0.30	1.63 (41.4)	0.28 (7.1)	0.34 (8.6)	0.81 (20.6)	0.25 (6.4)	1.43 (36.2)	1.10 (28)	19/32 (15.1)
BO□□-FNS2-05		1/4 Female NPT	0.19 (4.8)	1.20	0.70	2.00 (50.8)	0.38 (9.7)	0.44 (11.2)	1.00 (25.4)	0.19 (4.8)	1.64 (41.7)	1.57 (39.9)
BO□□-FNS4-05	0.90			0.75	2.06 (52.3)	1.03 (26.2)						
BO□□-FNS4-07			0.28 (7.1)	3.00	1.70	2.50 (63.5)	0.56 (14.2)	0.56 (14.2)	1.25 (31.8)	0.35 (9)	2.19 (55.5)	2.05 (52)
BO□□-FNS6-07	3/8 Female NPT	2.60		1.50								
BO□□-FNS8-10	1/2 Female NPT	0.41 (10.3)	6.30	3.50	3.12 (79.2)	0.69 (17.5)	0.69 (17.5)	1.56 (39.6)	0.49 (12.5)	2.67 (67.7)	3.13 (79.6)	11/2 (38.1)
BO□□-NS4-05	1/4 Male NPT	0.19 (4.8)	1.20	0.75	2.00 (50.8)	0.38 (9.7)	0.44 (11.2)	1.03 (26.2)	0.19 (4.8)	1.64 (41.7)	1.57 (39.9)	25/32 (19.8)
BO□□-FRT4-05	1/4 Female BSPT		0.90	—	2.06 (52.3)							
BO□□-FRT6-07	3/8 Female BSPT	0.28 (7.1)	2.60		2.50 (63.5)			0.56 (14.2)				
BO□□-FRT8-10	1/2 Female BSPT	0.41 (10.3)	6.30			3.12 (79.2)	0.69 (17.5)	0.69 (17.5)		0.49 (12.5)	2.67 (67.7)	3.13 (79.6)
BO□□-FO4-03	1/4 Male FO	0.13 (3.2)	0.60	0.35	1.75 (44.4)	0.38 (9.7)	0.34 (8.6)	0.94 (23.9)	0.25 (6.4)	1.43 (36.2)	1.10 (28)	19/32 (15.1)
BO□□-FO4-05		0.19 (4.8)	2.40	0.90	1.88 (47.8)		0.44 (11.2)		0.19 (4.8)	1.64 (41.7)	1.57 (39.9)	25/32 (19.8)
BO□□-FR4-03	1/4 Male FR	0.13 (3.2)	0.60	0.35	2.13 (54.1)		0.34 (8.6)	1.09 (27.7)	0.25 (6.4)	1.43 (36.2)	1.10 (28)	19/32 (15.1)
BO□□-FR4-05		0.19 (4.8)	2.40	0.90					0.44 (11.2)	0.19 (4.8)	1.64 (41.7)	1.57 (39.9)
BO□□-FR8-07	1/2 Male FR	0.28 (7.1)	6.00	—	2.88 (73.2)	0.56 (14.2)		—	0.35 (9)	2.19 (55.5)	2.05 (52)	1 1/8 (28.6)
BO□□-FR8-10			0.41 (10.3)		12.00		3.12 (79.2)		0.69 (17.5)			0.49 (12.5)

① Min. panel thickness: 3 mm

Switching (3-, 4-, 5-, 6- and 7-Way) Valves


Standard Flow Path

3-way Valves



3L Flow Path

This type of valve can connect one side port to the bottom port or shut off 3 ports. Switch between 0°, 90° and 180° positions with 180° rotation handle.

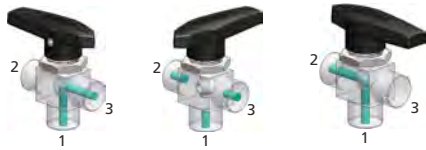

Ports 1 and 3 open

Off

Ports 1 and 2 open

4-way Valves



4L Flow Path

This type of valve can connect one side port to the bottom port, and shut off other 2 side ports at the same time. Switching can be done in 120° increments with 360° rotation handle.




Ports 1 and 2 open

Ports 1 and 3 open

Ports 1 and 4 open

5-way Valves



5L Flow Path

This type of valve can connect one side port to the bottom port, and shut off other 3 side ports at the same time. Switching can be done in 90° increments with 360° rotation handle.



Ports 1 and 2 open

Ports 1 and 3 open

Ports 1 and 4 open

Ports 1 and 5 open

6-way Valves



6L Flow Path

This type of valve can connect one side port to the bottom port, and shut off other 4 side ports at the same time. Switching can be done in 72° increments with 360° rotation handle.



Ports 1 and 2 open


Ports 1 and 3 open

Ports 1 and 4 open

Ports 1 and 5 open

Ports 1 and 6 open

7-way Valves

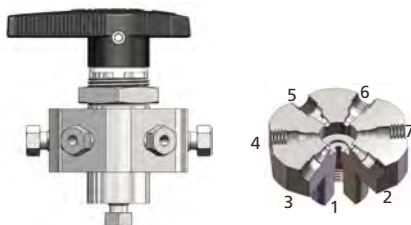

7L Flow Path

This type of valve can connect one side port to the bottom port, and shut off other 5 side ports at the same time. Switching can be done in 60° increments with 360° rotation handle.



Ports 1 and 2 open

Ports 1 and 3 open

Ports 1 and 4 open

Ports 1 and 5 open


Ports 1 and 6 open

Ports 1 and 7 open

Pressure vs. Temperature


Switching Valves

PTFE Packing Seat

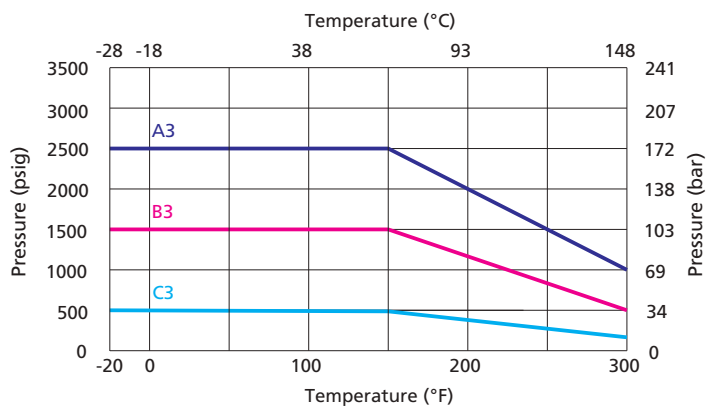


PFA, UHMWPE Packing Seat

The working temperature of UHMWPE packing seat should not be higher than 150°F (65°C).

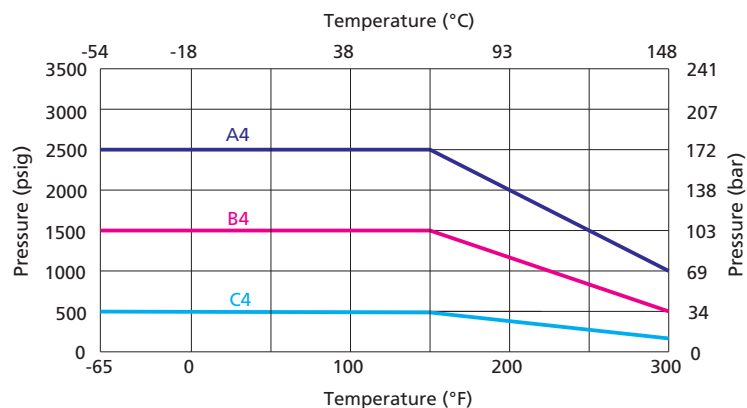


Dimensions


3-way Valves

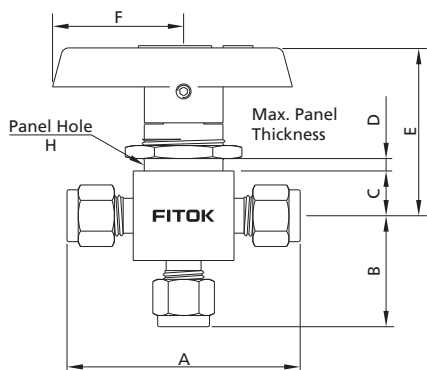

4-and 5-way Valves

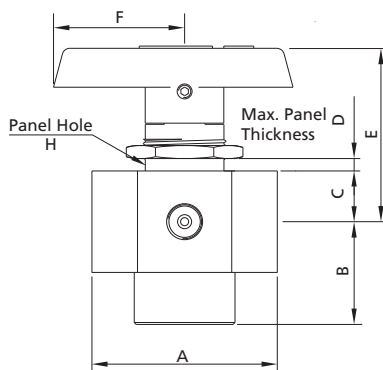

6-and 7-way Valves

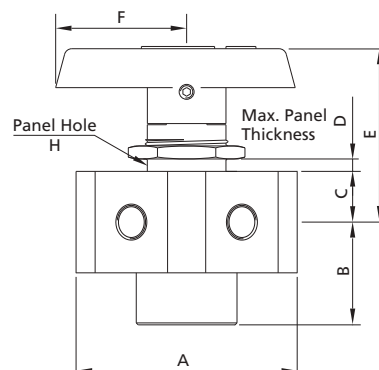

Basic Ordering Number	Connection Type and Size	Orifice in. (mm)	Cv	Dimensions, in. (mm)							
				A	B	C	D ^①	E	F	H	
	3-way Valves										
BO□□-FL1-00-3L	1/16" FITOK	0.05 (1.3)	0.08	1.68 (42.7)	0.81 (20.6)	0.34 (8.6)	0.25 (6.4)	1.43 (36.2)	1.10 (28)	19/32 (15.1)	
BO□□-FL2-02-3L	1/8" FITOK	0.09 (2.4)	0.15	2.01 (51.1)	0.97 (24.6)						
BO□□-FL4-03-3L	1/4" FITOK	0.13 (3.2)	0.35	2.21 (56.1)	1.07 (27.2)						
BO□□-FL4-05-3L		0.19 (4.8)	0.90	2.39 (60.7)	1.17 (29.7)	0.44 (11.2)	0.19 (4.8)	1.64 (41.7)	1.57 (39.9)	25/32 (19.8)	
BO□□-FL6-07-3L	3/8" FITOK	0.28 (7.1)	2.00	2.89 (73.4)	1.43 (36.3)	0.56 (14.2)	0.35 (9)	2.19 (55.5)	2.05 (52)	11/8 (28.6)	
BO□□-FL8-10-3L	1/2" FITOK	0.41 (10.3)	4.60	3.48 (88.4)	1.74 (44.2)	0.69 (17.5)	0.49 (12.5)	2.67 (67.7)	3.13 (79.6)	11/2 (38.1)	
BO□□-FL12-10-3L	3/4" FITOK		4.90								
BO□□-ML3-02-3L	3 mm FITOK	0.09 (2.4)	0.15	2.01 (51.1)	0.97 (24.6)	0.34 (8.6)	0.25 (6.4)	1.43 (36.2)	1.10 (28)	19/32 (15.1)	
BO□□-ML6-03-3L	6 mm FITOK	0.13 (3.2)	0.35	2.21 (56.1)	1.07 (27.2)						
BO□□-ML6-05-3L		0.19 (4.8)	0.90	2.39 (60.7)	1.17 (29.7)						0.44 (11.2)
BO□□-ML8-05-3L	8 mm FITOK		0.80	2.46 (62.5)	1.20 (30.5)						
BO□□-ML10-07-3L	10 mm FITOK	0.28 (7.1)	2.00	2.89 (73.4)	1.43 (36.3)	0.56 (14.2)	0.35 (9)	2.19 (55.5)	2.05 (52)	1 1/8 (28.6)	
BO□□-ML12-10-3L	12 mm FITOK	0.41 (10.3)	4.60	3.48 (88.4)	1.74 (44.2)	0.69 (17.5)	0.49 (12.5)	2.67 (67.7)	3.13 (79.6)	1 1/2 (38.1)	
BO□□-FNS2-03-3L	1/8 Female NPT	0.13 (3.2)	0.30	1.63 (41.4)	0.81 (20.6)	0.34 (8.6)	0.25 (6.4)	1.43 (36.2)	1.10 (28)	19/32 (15.1)	
BO□□-FNS4-05-3L	1/4 Female NPT	0.19 (4.8)	0.75	2.06 (52.3)	1.03 (26.2)	0.44 (11.2)	0.19 (4.8)	1.64 (41.7)	1.57 (39.9)	25/32 (19.8)	
BO□□-FNS4-07-3L		0.28 (7.1)	1.70	2.5 (63.5)	1.18 (30)	0.56 (14.2)	0.35 (9)	2.19 (55.5)	2.05 (52)	1 1/8 (28.6)	
BO□□-FNS6-07-3L			3/8 Female NPT								1.50
BO□□-FNS8-10-3L	1/2 Female NPT	0.41 (10.3)	3.50	3.13 (79.5)	1.56 (39.6)	0.69 (17.5)	0.49 (12.5)	2.67 (67.7)	3.13 (79.6)	1 1/2 (38.1)	
BO□□-FRT4-05-3L	1/4 Female BSPT	0.19 (4.8)	0.75	2.06 (52.3)	1.03 (26.2)	0.44 (11.2)	0.19 (4.8)	1.64 (41.7)	1.57 (39.9)	25/32 (19.8)	
BO□□-FRT6-07-3L	3/8 Female BSPT	0.28 (7.1)	1.50	2.5 (63.5)	1.18 (30)	0.56 (14.2)	0.35 (9)	2.19 (55.5)	2.05 (52)	1 1/8 (28.6)	
BO□□-FRT8-10-3L	1/2 Female BSPT	0.41 (10.3)	3.50	3.13 (79.5)	1.56 (39.6)	0.69 (17.5)	0.49 (12.5)	2.67 (67.7)	3.13 (79.6)	1 1/2 (38.1)	
4 - & 5-way Valves											
BO□□-FL2-01-4L	1/8" Female FITOK Tube Fitting	0.06 (1.6)	0.07	2.36 (60)	1.32 (33.5)	0.44 (11.2)	0.20 (5.2)	1.76 (44.6)	1.57 (39.9)	29/32 (23.1)	
BO□□-FL2-01-5L				1.85 (47)	0.88 (22.4)						
BO□□-FNS2-01-4L	1/8 Female NPT	0.06 (1.6)	0.07								1.55 (39.4)
BO□□-FNS2-01-5L											
BO□□-FNS8-10-4L	1/2 Female NPT	0.41 (10.3)	3.50	3.13 (79.5)	1.56 (39.6)	0.69 (17.5)	0.41 (10.5)	2.67 (70.2)	2.63 (66.7)	1 1/2 (38.1)	
BO□□-FNS8-10-5L											
6 - & 7-way Valves											
BO□□-FL1-00-6L	1/16" Female FITOK Tube Fitting	0.05 (1.3)	0.05	2.64 (67)	1.32 (33.5)	0.44 (11.2)	0.28 (7)	1.76 (44.6)	1.57 (39.9)	29/32 (23.1)	
BO□□-FL1-00-7L											
BO□□-FL2-01-6L	1/8" Female FITOK Tube Fitting	0.06 (1.6)	0.07	2.26 (57.6)	0.97 (24.7)						
BO□□-FL2-01-7L											

① Min. panel thickness: 3 mm

Crossover (4-, 6-Way) Valves

Standard Flow Path

4-way Valves




6-way Valves



4C Flow Path

This type of valve can connect two groups of adjacent ports at the same time. Switch between 0° and 90° positions with 90° rotation handle.

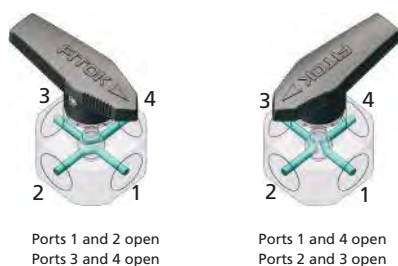

6C Flow Path


This type of valve can connect three groups of adjacent ports at the same time. Switch between 0° and 60° positions with 60° rotation handle.



Pressure vs. Temperature

Crossover Valves

PTFE Packing Seat

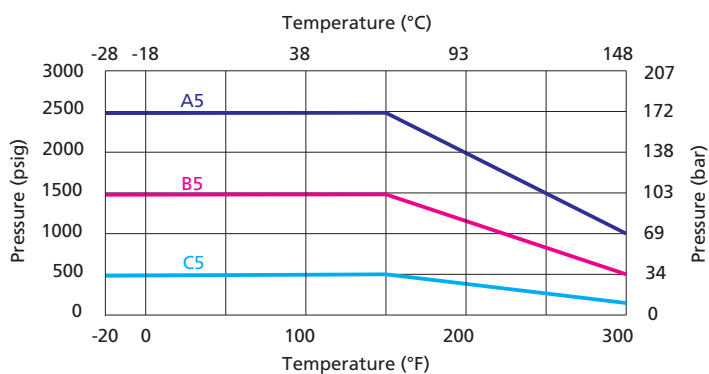




A5: 4-way (orifice 0.06")

B5: 4-way (orifice 0.28")

C5: 6-way (orifice 0.05" & 0.06")

PFA, UHMWPE Packing Seat

The working temperature of UHMWPE packing seat should not be higher than 150°F (65°C).

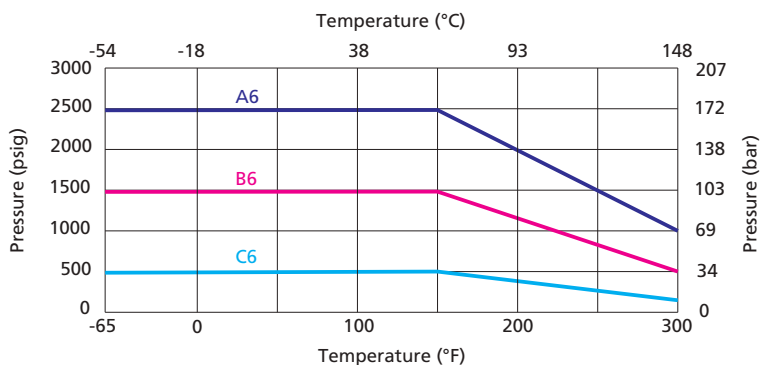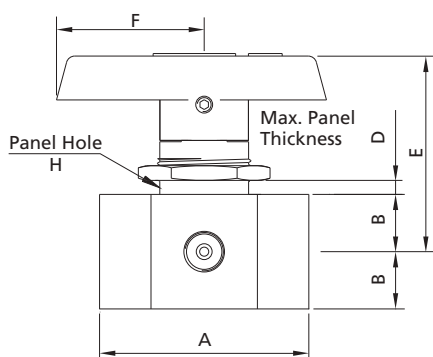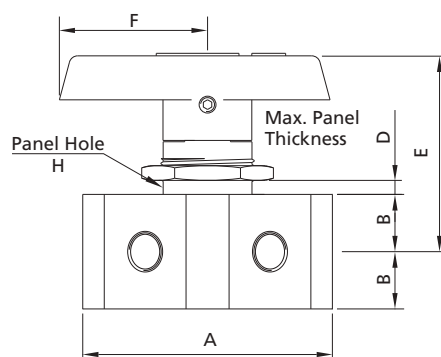**Dimensions****4-way Valves****6-way Valves**

Basic Ordering Number	Connection Type and Size	Orifice in. (mm)	Cv	Dimensions, in. (mm)					
				A	B	D	E	F	H
4-way Valve									
BO□□-FL1-00-4C	1/16" Female FITOK Tube Fitting ^①	0.05 (1.3)	0.06	1.95 (49.6)	0.44 (11.2)	0.19 (4.8)	1.64 (41.7)	1.57 (39.9)	25/32 (19.8)
BO□□-FL2-01-4C	1/8" Female FITOK Tube Fitting ^①	0.06 (1.6)	0.08	2.61 (66.3)					
BO□□-FNS2-01-4C	1/8 Female NPT ^①			1.55 (39.4)					
BO□□-FNS8-07-4C	1/2 Female NPT ^②	0.28 (7.1)	1.60	3.13 (79.5)	0.69 (17.5)	0.48 (12.2)	2.67 (67.7)	3.13 (79.6)	1 1/2 (38.1)
6-way Valve									
BO□□-FL1-00-6C	1/16" Female FITOK Tube Fitting	0.05 (1.3)	0.06	1.95 (49.5)	0.44 (11.2)	0.19 (4.8)	1.68 (42.7)	1.53 (38.9)	29/32 (23.1)
BO□□-FL2-01-6C	1/8" Female FITOK Tube Fitting	0.06 (1.6)	0.08	2.59 (65.8)					

Notes: Connection type for ball valves in 4L, 5L, 6L, 7L, 4C, 6C, 4H, 4HL, 4V, 5HL, 5H and 5LV flow path is female FITOK tube fitting, which can not be used directly with standard FT and MT connections. Please contact FITOK Group or authorized distributors for use with standard FT and MT connections.

① There might be an across-connection flow during switching. If it is not acceptable to you, please specify a spherical orifice of 0.049 in. Example: BOSS-FL2-01-4C-049.

② There might be an across-connection flow during switching. If it is not acceptable to you, please specify a spherical orifice of 0.093 in. Example: BOSS-FNS8-07-4C-093.

1. FITOK means FITOK double ferrule tube fittings.

2. Sizes and types listed are standard. Other sizes and types are available upon request, please contact FITOK Group or our authorized distributors.

3. Dimensions are shown with tube fitting nuts finger-tightened. All dimensions are for reference only and are subject to change.

For dimensions not shown above, please contact FITOK Group or our authorized distributors.


Special Flow Path

3-way Valves



3HL Flow Path

This type of valve can connect one side port to the bottom port, or connect two side ports to the bottom port. Switching can be done in 90° increments with 180° rotation handle.

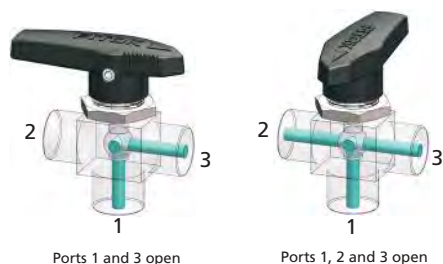

Note: For Temperature VS. Pressure curves and dimensions of 3-way valves, see Switching (3-way) Valves above. For Temperature VS. Pressure curves and dimensions of 4-way valves, see Crossover (4-way) Valves above.

4-way Valves



4H Flow Path

This type of valve can connect two opposite ports. Switch between 0° and 90° positions with 90° rotation handle.



4HL Flow Path

This type of valve can connect three adjacent ports and shut off other ports. Switching can be done in 90° increments with 360° rotation handle.



4V Flow Path

This type of valve can connect two adjacent ports and shut off other ports. Switching can be done in 90° increments with 360° rotation handle.



5-way Valves



5H Flow Path

This type of valve can connect the bottom port to port 2 and port 4, or connect the bottom port to port 3 and port 5. Switch between 0° and 90° positions with 90° rotation handle.


5HL Flow Path

This type of valve can connect three side ports to the bottom port, and shut off the fourth side port at the same time. Switching can be done in 90° increments with 360° rotation handle.



5LV Flow Path

This type of valve can connect two adjacent ports to the bottom port, and shut off other two side ports at the same time. Switching can be done in 90° increments with 360° rotation handle.

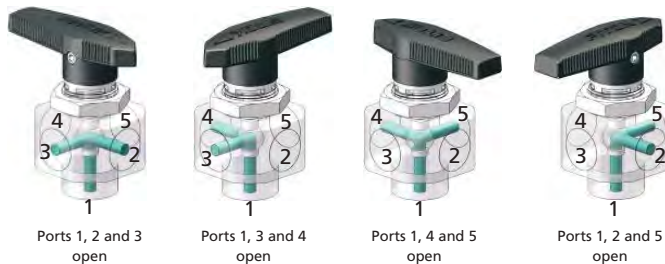

Note: For Temperature vs. Pressure curve and dimensions of 5-way valves, see Switching (5-way) Valves above.

Vent Port Options

Vented Valves

The maximum working pressure for vented valves is 500 psig (34.5 bar).

Straight-pattern Valves

A vent hole in the side of the valve body makes the downstream port vent to atmosphere when the valve is closed.

Angle-pattern and 3-way Valves

A vent hole in the side of the valve body makes the bottom port vent to atmosphere when the valve is closed.

Welded Vent Port Connections

A FITOK tube fitting or a tube stub welded to the vent port is available for stainless steel vented valves.

Process Option

Valves with FOG process are available. FOG refers to FC-02 without lubrication.

To order a valve with FOG process, add -FOG suffix to the valve ordering number, for example: BOSS-FL4-05-FOG.

The pressure rating of valves with FOG process: 200 psig (13.8 bar) for orifice 10, 500 psig (34.5 bar) for other orifice.


The starting torque of valves with FOG process is greater than that of the lubricated valves.

Bottom Screw Panel Mounting Options


Mounting Dimensions

The bottom screw panel mounting options are not available on angle-pattern valves, 3-way valves, 6-way valves and 7-way valves.


2-way

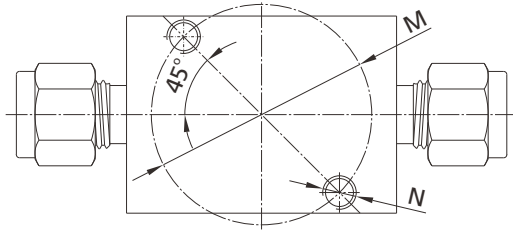

4-way



5-way

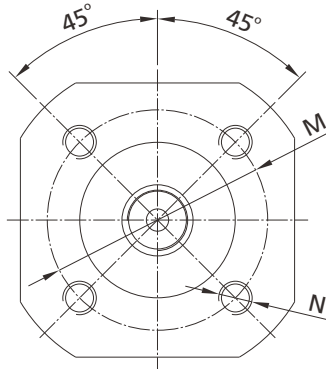

	Orifice in. (mm)	Dimensions, in. (mm)	
		M	N
2-way	0.05~0.13 (1.3~3.2)	0.63 (15.88)	M2.5 x 0.45 deep 0.24" (6)
	0.19 (4.8)	0.88 (22.23)	M3 x 0.5 deep 0.24" (6)
	0.28 (7.1)	1.25 (31.75)	M5 x 0.8 deep 0.24" (6)
	0.41 (10.3)	1.63 (41.28)	M5 x 0.8 deep 0.24" (6)
4-way	0.05~0.06 (1.3~1.6)	1.25 (31.75)	M5 x 0.8 deep 0.24" (6)
	0.28 (7.1)	2.00 (50.8)	M5 x 0.8 deep 0.24" (6)
5-way	0.05~0.06 (1.3~1.6)	1.25 (31.75)	M5 x 0.8 deep 0.24" (6)
	0.41 (10.3)	2.00 (50.8)	M5 x 0.8 deep 0.24" (6)

Locking Device

- ⦿ Locking Device 1 can lock BO series valves with 90° or 180° rotation handle, locking hole diameter is 0.21 in (5.2 mm);
- ⦿ To order a ball valve with locking device 1, add -LH to the valve ordering number.
Example: BOSS-FL6-07-LH/BOSS-FL6-07-3L-LH
- ⦿ Locking Device 2 can lock BO series valves with 90°, 180°, or 360° rotation handle, locking hole diameter is 0.34 in (8.7 mm);
- ⦿ To order a ball valve with locking device 2, add -LK to the valve ordering number.
Example: BOSS-ML6-05-LK/BOSS-ML6-05-5L-LK

Caution: These handles are designed to prevent unintentional valve operation. They are not tamper resistant and can be removed, even when locked.




Diagram of Locking Device 1




Diagram of Locking Device 2

Ball Valve without Handle

- ⦿ Ball Valve without handle can be directly connected to the FITOK actuator assembly.
- ⦿ To order, please add -AM to the valve ordering number.

Example: BOSS-FL4-05-AM

Ordering Number Description

BOSS - ML6 - FL4 - ML8 - H05 - DXHQ3L - BLH - FL4 - SF2

Series	Body Material	Connection 1 Type	Connection 1 Size	Connection 2 to 7 Type	Connection 2 to 7 Size	Seat Material	Orifice Size	Handle/Actuator	For Actuator	Flow Pattern	Panel Installation	Locking Device	Vent Port	Special Application	Cleaning and Packaging
BO	SS 316 SS	FNS Female NPT	1 1/16"	Same as connection 1	Specified in the same way as connection 1 type and size	00 0.05" (1.3 mm)		Black Nylon Handle		None	Straight		No vent port	None	
	S4 304 SS	NS Male NPT	2 1/8"			01 0.06" (1.6 mm)		I Red Nylon Handle	H Mechanical Limit Switch	A Angle		FL2 1/8" tube fitting		S NACE MR0175	
	S1 321 SS	FRT Female BSPT	3 3 mm			02 0.09" (2.4 mm)		GR Green Nylon Handle	N Inductive Limit Switch	3L 3-way		FL4 1/4" tube fitting		SI Inert Silicon Coating	
	6L 316L SS	RT Male BSPT	4 1/4"			03 0.13" (3.2 mm)		J Blue Nylon Handle	Q Solenoid Valve	3HL 3-way		FL6 3/8" tube fitting			
	B Brass	FMS Female Metric Thread (for RG-M)	6 3/8" or 6 mm			05 0.19" (4.8 mm)		AM Without Handle	HQ Mechanical Limit Switch and Solenoid Valve	4L 4-way		ML3 3 mm tube fitting		CE CE Certification	
	M Alloy 400	MS Male Metric Thread (for RG-M)	8 1/2" or 8 mm			07 0.28" (7.1 mm)		U Black Aluminium Handle	NQ Inductive Limit Switch and Solenoid Valve	4H 4-way		ML6 6 mm tube fitting			
		FRP Female BSPP (for RP)	10 10 mm			10 0.41" (10.3 mm)		C 90° Normally Closed Pneumatic Actuator		4HL 4-way		ML8 8 mm tube fitting			FC-01
		FL Fractional Tube Fitting	12 3/4" or 12 mm					O 90° Normally Open Pneumatic Actuator		4V 4-way					F2 FC-02
		ML Metric Tube Fitting	14 14 mm					D 90° Double Acting Pneumatic Actuator		5L 5-way		No			FC-02 without Lubrication
		FO Male FO Fitting	16 16 mm					LX 180° Left End Normally Open Pneumatic Actuator		5HL 5-way		LH Locking Device 1			
		FR Male FR Fitting	18 18 mm					RX 180° Right End Normally Open Pneumatic Actuator		5LV 5-way		LK Locking Device 2			
								DX 180° Double Acting Pneumatic Actuator		6L 6-way		Panel nut			
								E 90° Electric Actuator		6C 6-way		B Bottom screw			
								EX 180° Electric Actuator		7L 7-way					

Note: "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.

- For oxygen-enriched environment or hazardous media service, contact FITOK Group or our authorized distributors.
- Cleaning and Packaging:
FC-01: Standard cleaning and packaging for general industrial procedures.
FC-02: Special cleaning and packaging for wetted system components to ensure compliance with product cleanliness requirement of ASTM G93 Level C.
- For more information about pneumatic actuator ball valves, please refer to the catalog Actuated Ball Valves.
- Inert Silicon Coating: Wetted metal components Inert Silicon coated.
- CE certification is available. For more information, please contact FITOK group or our authorized distributors.